
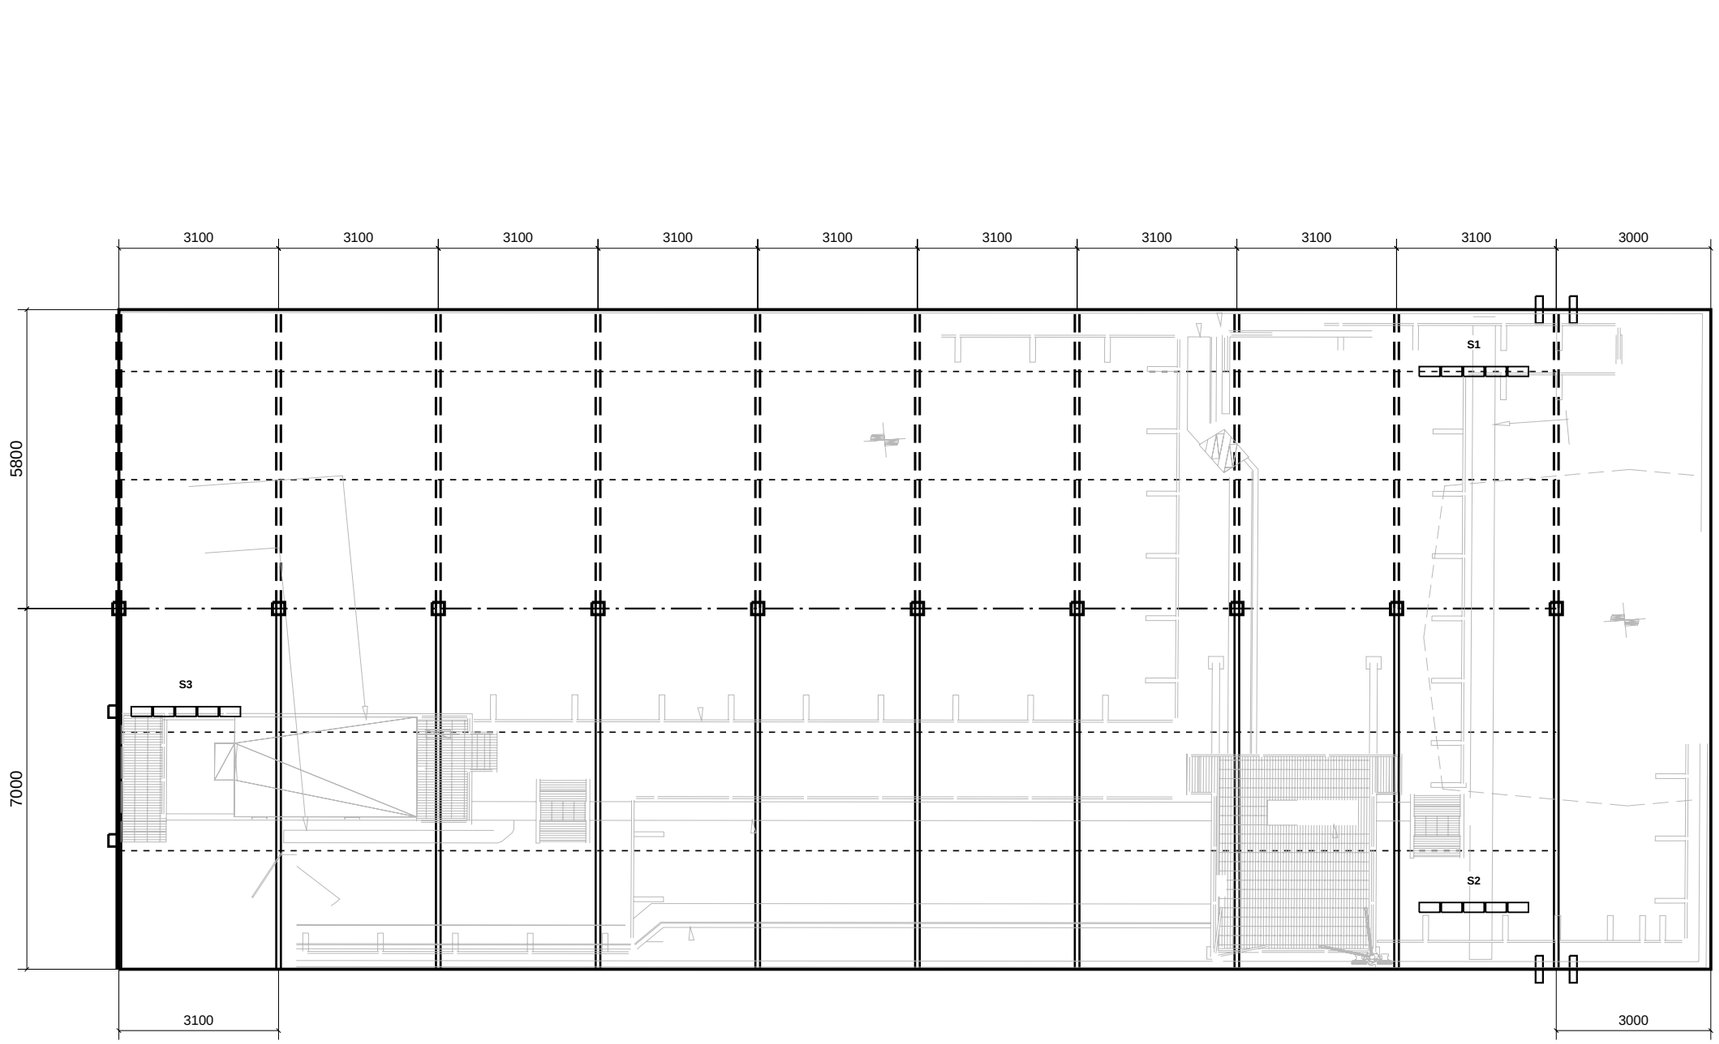


1 **Roof Support Layout**

NTS

External cabinet support steel

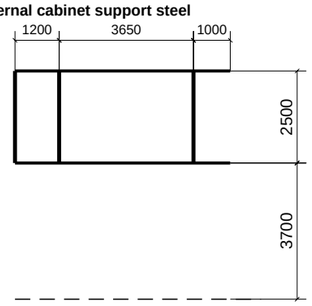


1 457 x 152 x 60

2/3 254 x 146 x 31

Antenna pole support: 150 x 140

Metal deck profile



2 **External Supports / Metal Deck**

NTS

DIMENSIONS IN mm

DRAWING NOTES

1. Metal deck roof; no scanning conducted.
2. Retained background grey; proposed equipment outlined black.
3. Existing east antenna groups on first column line from east wall.
4. I-section third value: kg/m. EA third value: thickness in mm.

MEMBER KEY

- 203 x 102 x 23
- 305 x 102 x 33
- 152 x 89 x 16
- EA 65 x 65 x 8
- Columns: 152 x 152 x 30

Concrete encased

Rev	Issue	Drawn	Chkd	Date
1	REVIEW	AT	AF	11-11-26

Consultant:

KA ENGINEERING GROUP

Client: JetNSL

JET network solutions

Drawing title:

Roof Support Layout


OASIS HOTEL

The Promenade, Great Yarmouth

Norfolk, NR30 2RB


Drawn: AT Checked: AF

7149-01 | Rev 1 NTS

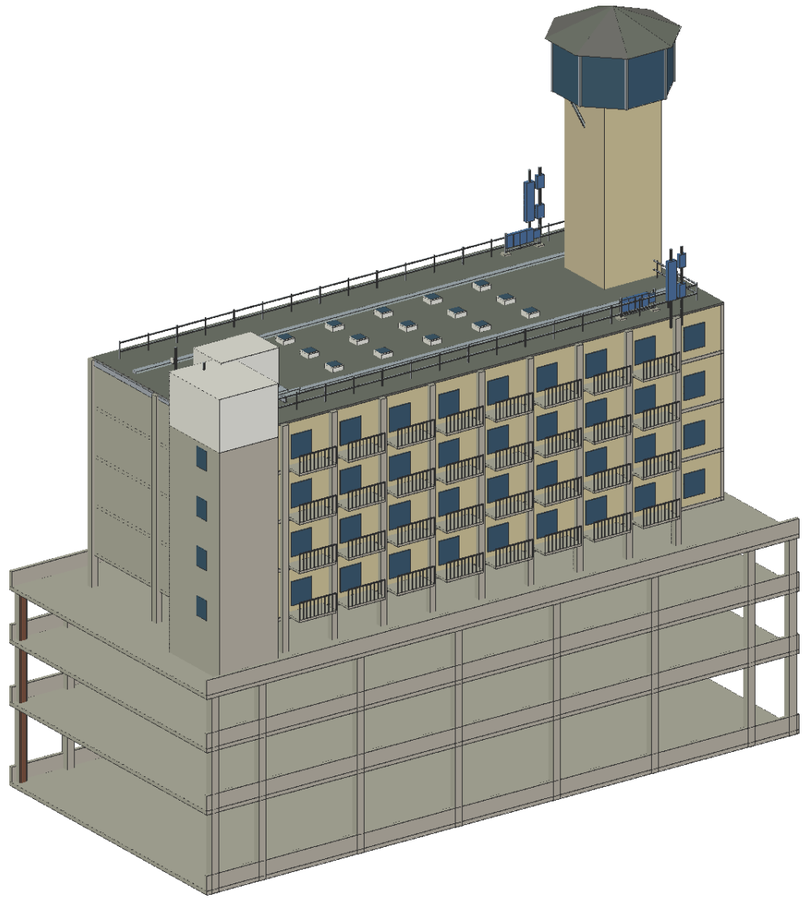

1 **Building - Retained / Proposed Equipment**

3D NTS

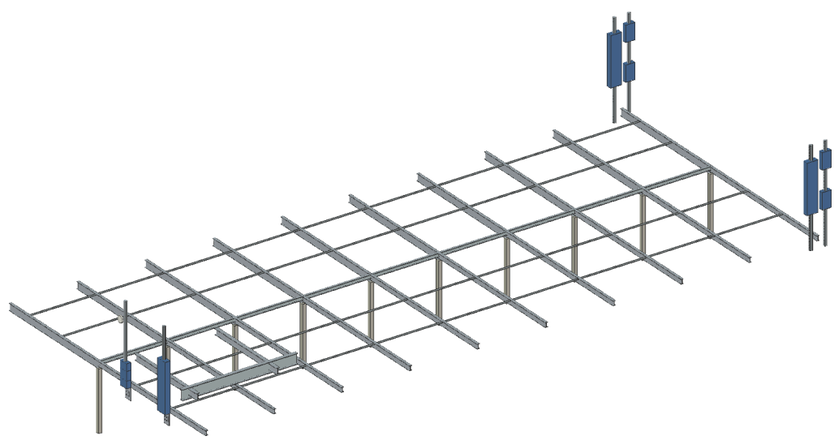

2 **Roof Steel / Antenna Support Locations**

3D NTS

DIMENSIONS IN mm

DRAWING NOTES

1. Existing retained equipment and proposed upgrades shown.

2. Main roof +24000; plant room +27000; tower +39000 AGL.

3. Building envelope and unmeasured details are visual representations.

4. Lower view omits roof covering to show supports.

VIEW KEY

Cream: tower / facade

Grey: roof / concrete

Blue-grey: glazing

Blue: proposed telecoms equipment

Rev	Issue	Drawn	Chkd	Date
1	REVIEW	AT	AF	11-11-26

Consultant:

KA ENGINEERING GROUP

Client: JetNSL

JET network solutions

Drawing title:

Building / Roof Supports

OASIS HOTEL


The Promenade, Great Yarmouth

Norfolk, NR30 2RB

Drawn: AT Checked: AF

7149-02 | Rev 1 NTS

West S3 antenna grillage connection

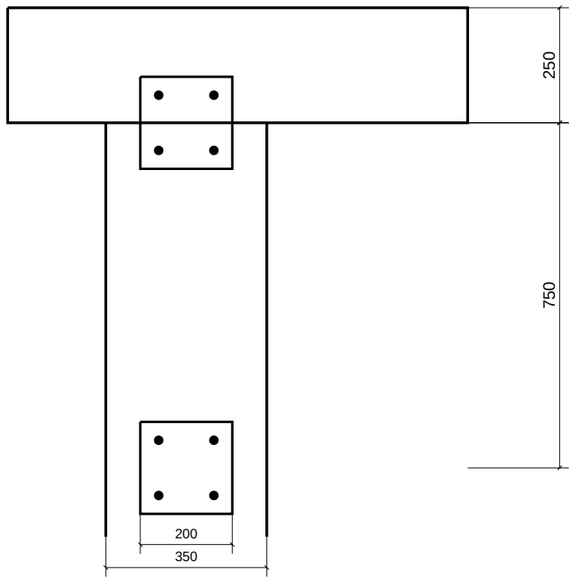

Two 200 x 200 plates

4 No. M16 bolts per plate

Existing west grillage supports

two S3 antenna pole positions.

Plate thickness and bolt centres

not specified in survey sketch.

1 S3 Grillage Connection

NTS

Proposed telecoms equipment - GA allocation

S1 / S2: 3 panels and 5 RRUs per sector; retain corrected east column locations.

S3: 3 panels on 2 west grillage poles; 5 RRUs; 300 diameter dish.

Panels: AFF3 500 x 230 x 2200; AFF6 / AFF1 410 x 190 x 730.

RRUs: 400 x 190 x 700 (4 per sector) and 400 x 190 x 450 (1 per sector).

2 Proposed Equipment Summary

GA revision 1A

DIMENSIONS IN mm

DRAWING NOTES

1. Existing west grillage supports two S3 antenna pole positions.
2. Plate dimensions and bolt size from survey sketch.
3. Proposed equipment from GA revision 1A.
4. No unmeasured hole centres or plate thickness dimensioned.

CONNECTION KEY

Plates: 200 x 200

Bolts: M16, four per plate

Bracket width: 350

Vertical reference spacing: 750

Rev	Issue	Drawn	Chkd	Date
1	REVIEW	AT	AF	11-11-26

Consultant:

KA ENGINEERING GROUP

Client: JetNSL

JET network solutions

Drawing title:

S3 Grillage / Proposed Equipment

OASIS HOTEL

The Promenade, Great Yarmouth

Norfolk, NR30 2RB

Drawn: AT Checked: AF

7149-03 | Rev 1 NTS