ALL DIMENSIONS IN mm UNLESS STATED OTHERWISE


NOTES:

1. Main roof +38.00 m; plant-room roof +41.57 m.

2. Columns continue from ground through main roof to plant-room roof / parapet level.

3. Upper roof framing: B1 long-dash; B2 dash-dot.

MAIN ROOF +38.00 m

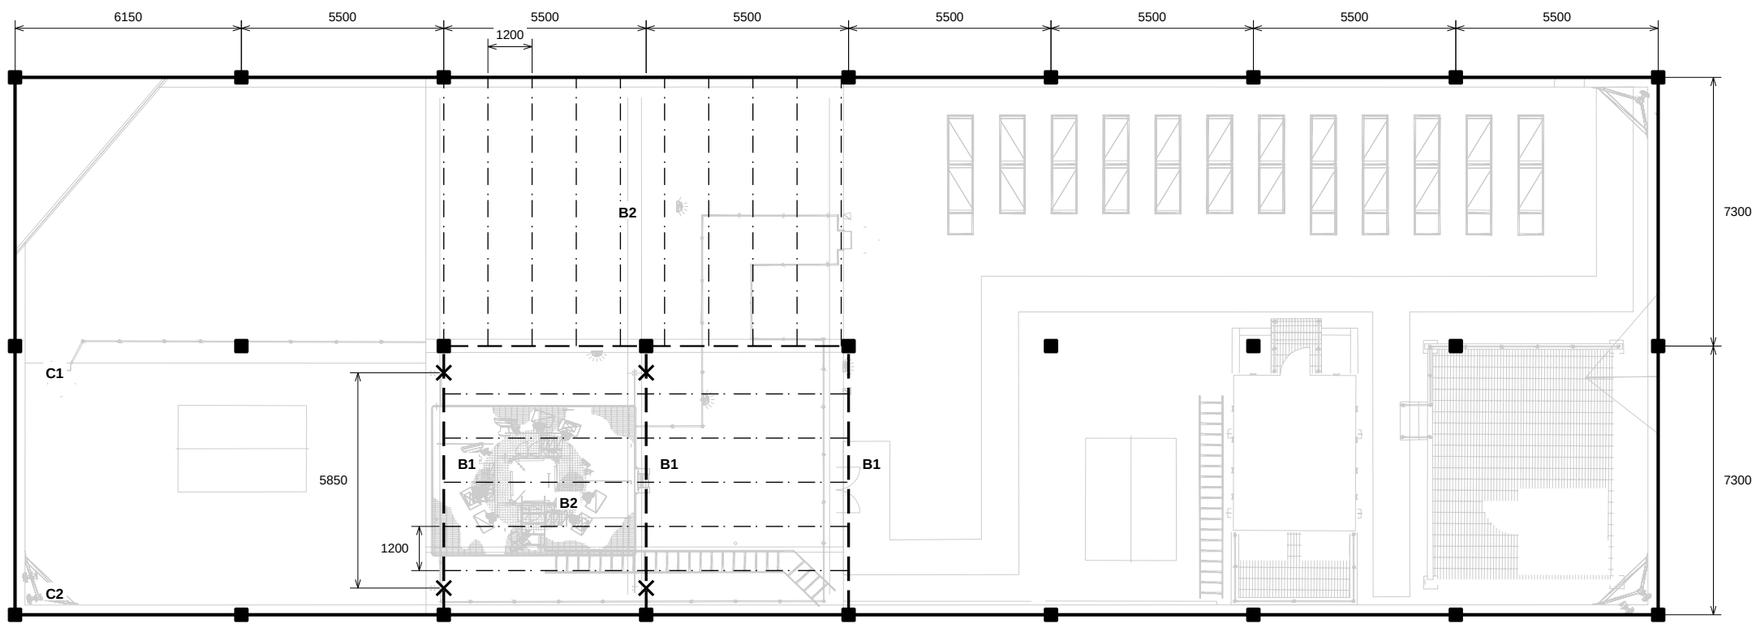

PLANT-ROOM ROOF ABOVE +41.57 m

C2 shown by exposed section; embedded portion / full size unverified.

STRUCTURAL MEMBER KEY

- Main-roof beam — 325 wide x 300 deep
- B1: plant-room roof beam — 380 x 380
- B2: plant-room roof beam — 380 wide x 180 deep
- C1 central columns: 380 x 380; C2 perimeter: 380 x 300 exposed
- GA reference geometry — Light background
- X: grillage connection — Pairs 5850 apart, centred

Rev	Issue	Drawn	Chkd	Date
TBC	REVIEW	AT	KS	24-10-26

Consultant:

KA ENGINEERING GROUP

Client:

Ancore

Drawing Title:

Roof Support Layout

Site / Address:

RIVER HOUSE
48 HIGH STREET, BELFAST
COUNTY ANTRIM, BT1 2DR

Drawn: AT Checked: KS

Scale: NTS / DO NOT SCALE

Project: 7078 Drawing: 7078-01

Revision: TBC