KA ENGINEERING GROUP

ASMER HOUSE | ROOF SUPPORT ARRANGEMENT

SCHEMATIC FOR ENGINEER REVIEW • NOT REGISTERED TO CLIENT GA • NOT FOR CONSTRUCTION

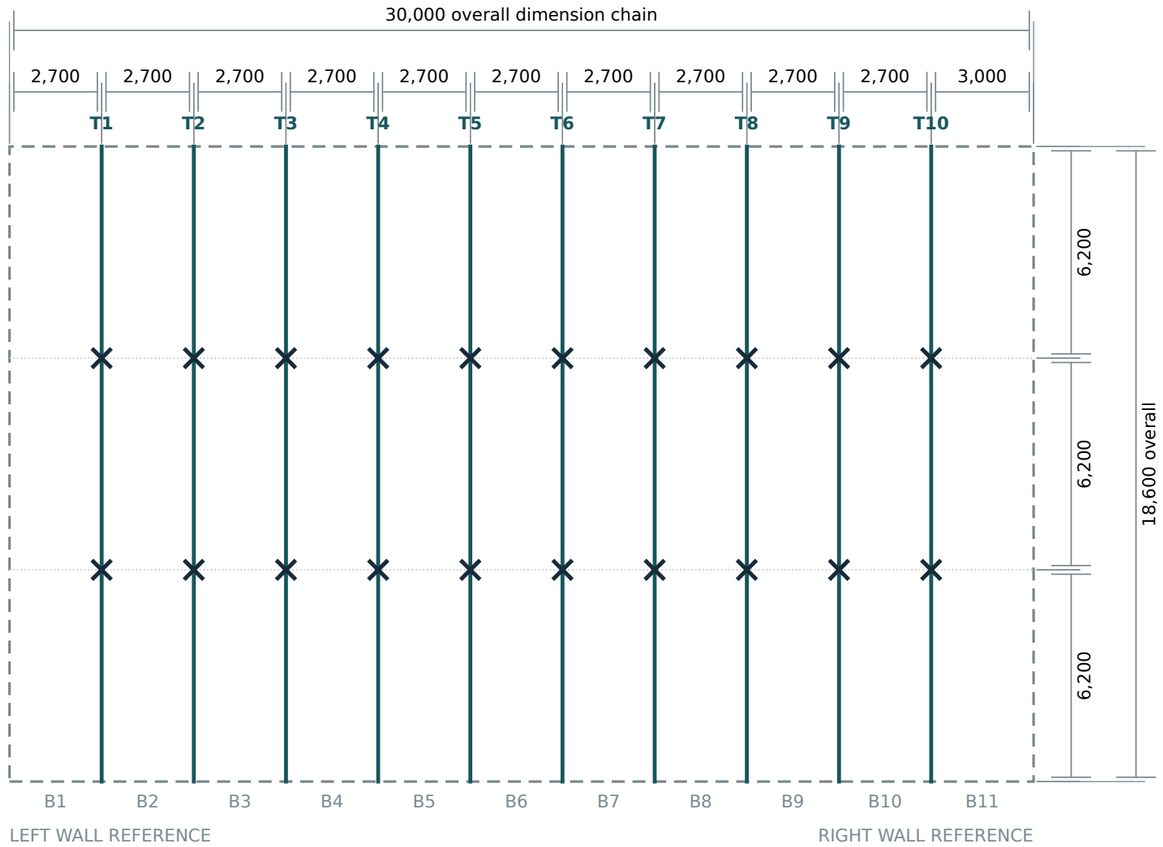

MAIN RECTANGLE ONLY — STEPPED SECTIONS AT BOTH ENDS EXCLUDED

LONGITUDINAL BEAMS — CONNECTIVITY ONLY

Two dashed runs shown in survey sketch; continuous for sketch. Exact offsets and end details are unverified.

Diagram above is topological, not a plan: it does not position longitudinal beams relative to the columns.

Longitudinal beams connect to transverse beams, not directly to columns. Sketch continuity does not establish moment continuity.

SOURCES: Survey Notes (1).pdf, p3; client GA Rev A, drawing 200 (PDF p3), reference only; engineering lead clarifications.

CHECKS: longitudinal chain and transverse sum verified; 20 column intersections verified. GA registration and containment NOT VALIDATED.

DRAWING BASIS

All dimensions in millimetres.

Relative dimension-chain geometry only. Do not scale or use for setting out.

Dashed perimeter = wall references, not confirmed wall-position beams. Wall face / centreline datum unresolved.

10 internal transverse beams; 20 internal columns marked ×. T labels are introduced review IDs.

Transverse beams assumed to end at external load-bearing walls. Actual end support details remain unverified.

Beams at either end wall were not visible; presence remains unconfirmed.

Member section sizes not verified on this review sheet.

No structural capacity, connection adequacy or GA containment checks.