
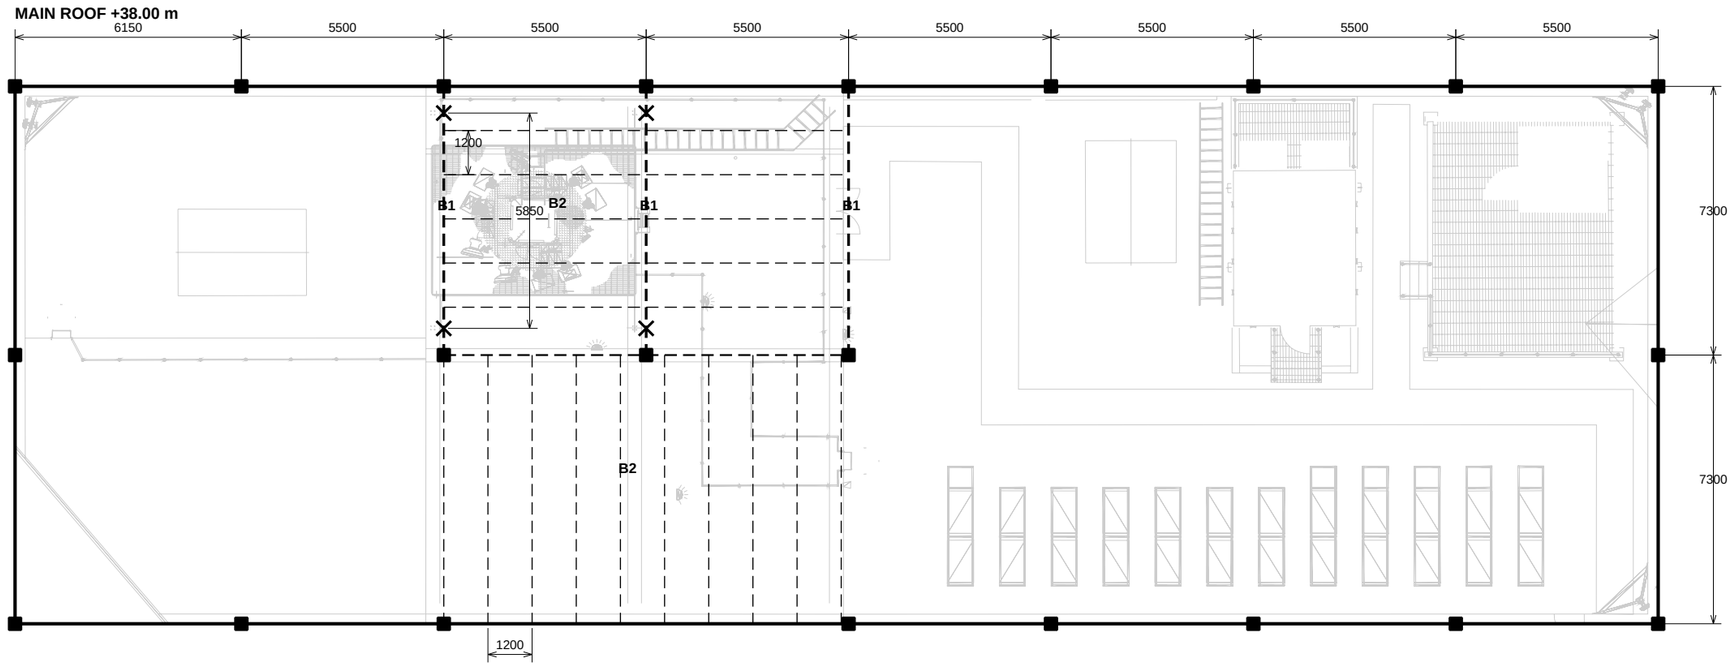


PLANT-ROOM ROOF ABOVE +41.57 m

LEVEL / COLUMN CONTINUITY

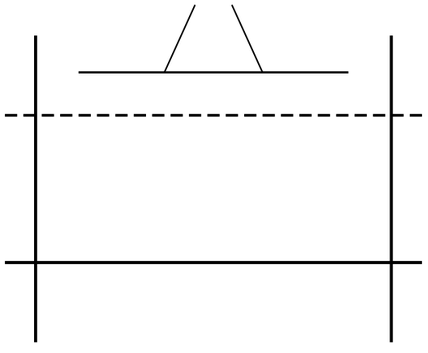

Telecom grillage / stub tower (schematic)

Plant-room roof +41.57 m: B1 / B2

Main roof +38.00 m: 325 x 300 beams

Columns continue below to ground

Local bearings and C1/C2 identification require confirmation.

ALL DIMENSIONS IN mm UNLESS STATED OTHERWISE

NOTES:

1. Main roof +38.00 m; plant-room roof +41.57 m. Levels supplied by engineer.

2. Columns continue from ground through main roof to plant-room roof / parapet level.

3. Upper B1/B2 framing is projected dashed onto the main-roof plan.

4. Member material, local bearings and dimension datums remain for confirmation.

5. X = grillage connection; pairs 5850 apart, centred in 7300 half-width.

STRUCTURAL MEMBER KEY

- Main-roof beam — 325 wide x 300 deep
- B1: plant-room roof beam — 380 x 380
- B2: plant-room roof beam — 380 wide x 180 deep
- Columns: C1 380 x 380 — C2 380 x 300; ID locations TBC
- GA reference geometry — Light background

Rev	Issue	Drawn	Chkd	Date
TBC	REVIEW	AT	KS	24-10-26

Consultant:

KA ENGINEERING GROUP

Client:

Ancore

Drawing Title:

Roof Support Layout

Site / Address:

RIVER HOUSE
48 HIGH STREET, BELFAST
COUNTY ANTRIM, BT1 2DR

Drawn: AT Checked: KS

Scale: NTS / DO NOT SCALE

Project: 7078 Drawing: 7078-01

Revision: TBC