Antenna Schedule

SECTOR	MAKE / MODEL	HEIGHT(m)	BEARING(°)	STATUS
A	HUAWEI AHP4517R7v06	47.80m	341°	REUSE
B	HUAWEI AHP4517R7v06	47.80m	82°	REUSE
C	HUAWEI AHP4517R7v06	47.80m	203°	REUSE
A	HUAWEI AOC4518R8	47.80m	341°	EXISTING
B	HUAWEI AOC4518R8	47.80m	82°	EXISTING
C	HUAWEI AOC4518R8	47.80m	203°	EXISTING
A	ERICSSON AIR3278	49.40m	341°	EXISTING
B	ERICSSON AIR3278	49.40m	82°	EXISTING
C	ERICSSON AIR3278	49.40m	203°	EXISTING
A	HUAWEI AAU5614	49.40m	341°	REPLACE
B	HUAWEI AAU5614	49.40m	82°	REPLACE
C	HUAWEI AAU5614	49.40m	203°	REPLACE
A	ERICSSON AIR3258	49.40m	341°	PROPOSED
B	ERICSSON AIR3258	49.40m	82°	PROPOSED
C	ERICSSON AIR3258	49.40m	203°	PROPOSED

Equipment & Technology Key:


CABINET	TECHNOLOGY	STATUS
(1) eHYBRID CABINET	L800/L1800/L2100/L2600/3500	EXISTING
(2) FCIA	U2100/UCUs	EXISTING
(3) Tx 3No.	Tx	EXISTING
(4) EMERSON PSU	POWER	EXISTING
(5) ELTEK EF2S PSU	POWER	EXISTING
(6) NOKIA NODE B	REDUNDANT	EXISTING
(7) IFS5906	L800/L1400/L1800/L2100/3600	REPLACE
(8) 6130 CABINET	L700/L800/L1400/L1800/L2100/3600	PROPOSED


Feeder Key:

DESCRIPTION	LINE TYPE	LENGTH(m)	LOSSES (dB)
L700/L800		-	-
L1800/2100		-	-
L1400		-	-
3600		-	-
GPS		8m	-
TX		-	-
AC		-	-
FIBRE/DC		-	-


NOTE:
PROPOSED UPGRADE WILL NOT IMPACT ON THE STRUCTURAL CAPACITY OF THE STRUCTURE. LOADING WITHIN CAPACITY.
- AIR 3258:- 28kg / 473N FRONT & 159N SIDE
- AAU 5614:- 41kg / 500N FRONT & 210N SIDE

RF Code: 4G++5G_ID_EXIST+32T_{A-4440}_(0)_[0]

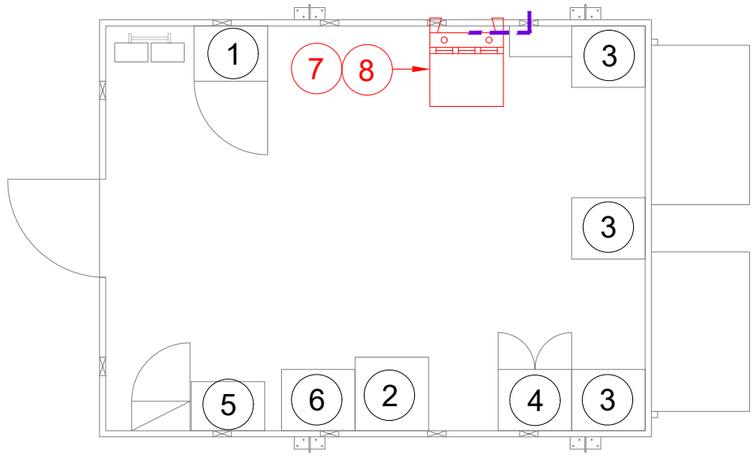

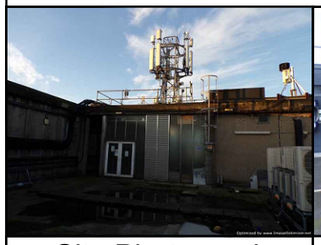
Site Photograph


Access Route

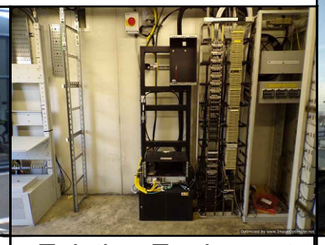
Existing Equipment


Structure

Site Name: RIVER HOUSE

Site ID: 1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project: H3G HRV

NGR: E:146489 N:529889

Site Access:
- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:
- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:
- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM

circet UK


Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Scale: 0 1:25 0.5m 1

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

Existing EE Configuration to remain unchanged

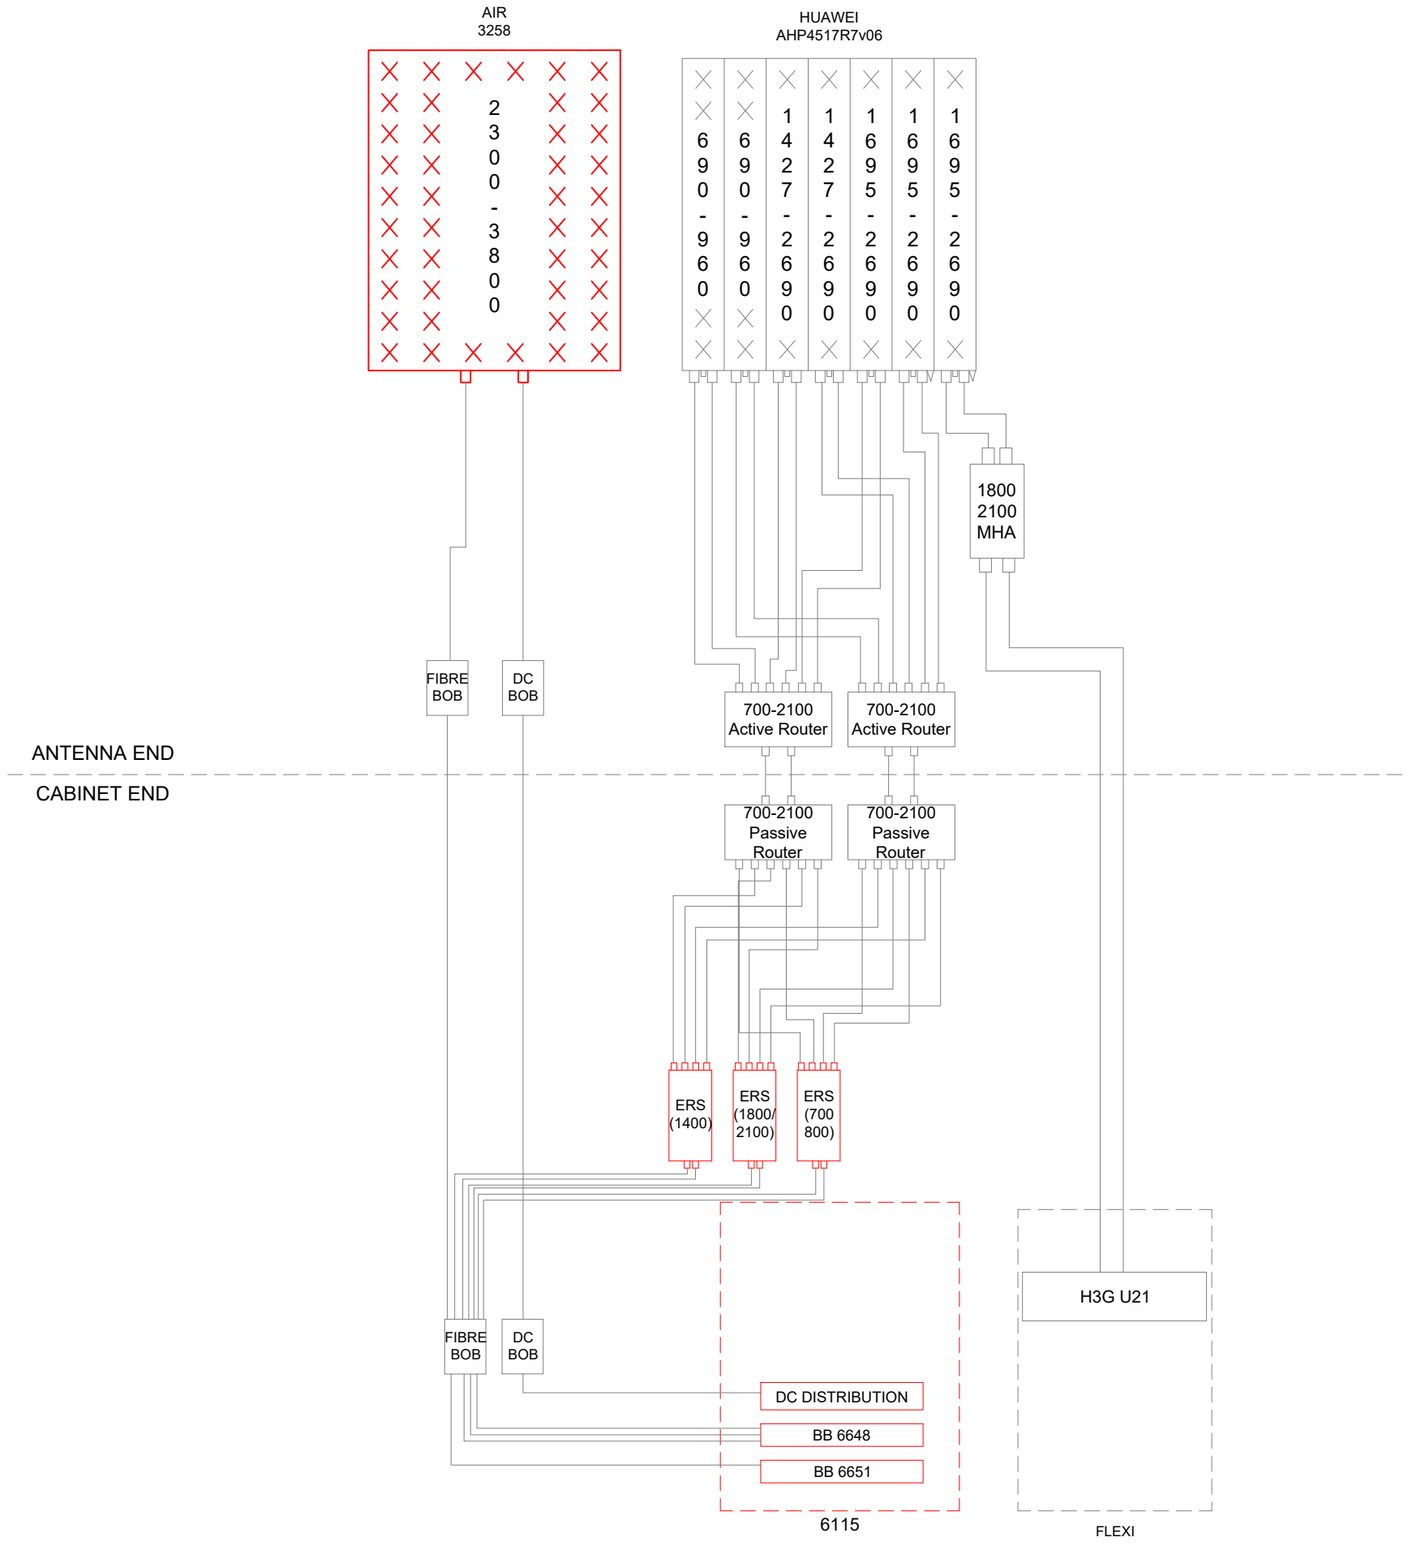

Site Name: RIVER HOUSE

Site ID: 1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project: H3G HRV

NGR: E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM

circet UK

Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

N

EXISTING 1No. H3G AAU5614 ANTENNA TO BE REMOVED AND REPLACED WITH 1No. 3258 AIR ANTENNA MOUNTED ON EXISTING SUPPORT POLE

EXISTING 1No. HUAWEI AHP4517R7v06 ANTENNA MOUNTED ON EXISTING SUPPORT POLE


EXISTING GPS NODE TO BE REMOVED AND REPLACED WITH PROPOSED GPS MODULE ON EXISTING ANTENNA SUPPORT POLE

EXISTING RD0725 ROUTERS ON SUPPORT POLES TO BE REUSED FOR PROPOSED UPGRADE

EXISTING 3No. H3G RRUs TO BE REMOVED AND REPLACED WITH 1No. 18/21 ERS UNIT, 1No. 1400 ERS UNIT AND 1No. 700/800 ERS UNIT FIXED TO EXISTING STEEL WORK VIA 580mm ERS RAIL

EXISTING 1No. H3G AAU5614 ANTENNA TO BE REMOVED AND REPLACED WITH 1No. 3258 AIR ANTENNA MOUNTED ON EXISTING SUPPORT POLE

EXISTING 1No. HUAWEI AHP4517R7v06 ANTENNA MOUNTED ON EXISTING SUPPORT POLE

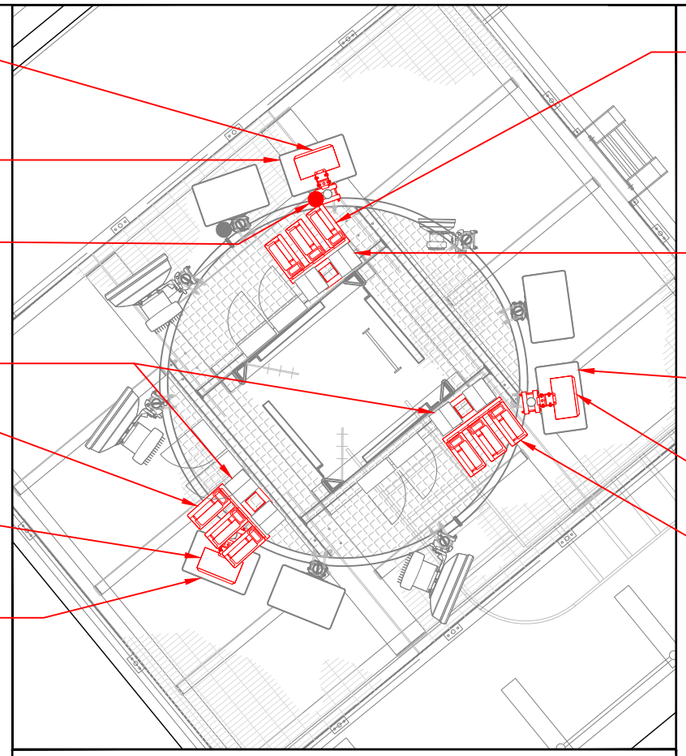

EXISTING 3No. H3G RRUs TO BE REMOVED AND REPLACED WITH 1No. 18/21 ERS UNIT, 1No. 1400 ERS UNIT AND 1No. 700/800 ERS UNIT FIXED TO EXISTING STEEL WORK VIA 580mm ERS RAIL

EXISTING RD0725 ROUTER ON SUPPORT POLE TO BE REUSED FOR PROPOSED UPGRADE

EXISTING 1No. HUAWEI AHP4517R7v06 ANTENNA MOUNTED ON EXISTING SUPPORT POLE

EXISTING 1No. H3G AAU5614 ANTENNA TO BE REMOVED AND REPLACED WITH 1No. 3258 AIR ANTENNA MOUNTED ON EXISTING SUPPORT POLE


EXISTING 3No. H3G RRUs TO BE REMOVED AND REPLACED WITH 1No. 18/21 ERS UNIT, 1No. 1400 ERS UNIT AND 1No. 700/800 ERS UNIT FIXED TO EXISTING STEEL WORK VIA 580mm ERS RAIL

Antenna Plan

Scale: 0 1:50 1m 2

EXISTING GPS NODE TO BE REMOVED AND REPLACED WITH PROPOSED GPS MODULE ON EXISTING ANTENNA SUPPORT POLE

C/L OF PROPOSED ANTENNAS +47.80m AGL

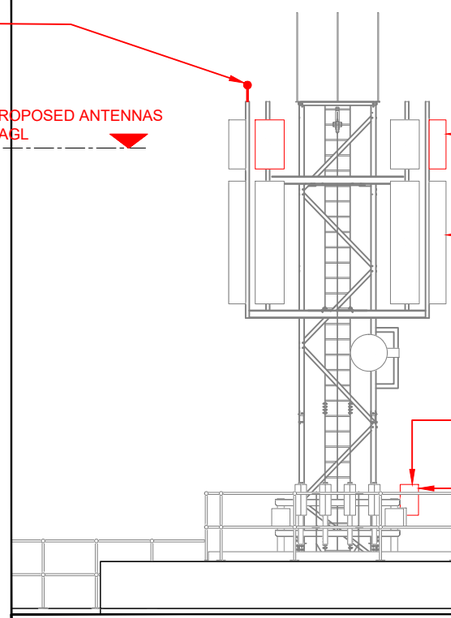

EXISTING 3No. H3G AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. 3258 AIR ANTENNAS MOUNTED ON EXISTING SUPPORT POLES

EXISTING 3No. HUAWEI AHP4517R7v06 ANTENNAS MOUNTED ON EXISTING SUPPORT POLES

EXISTING RD0725 ROUTERS ON SUPPORT POLES TO BE REUSED FOR PROPOSED UPGRADE

EXISTING 3No. H3G RRUs TO BE REMOVED AND REPLACED WITH 1No. 18/21 ERS UNIT, 1No. 1400 ERS UNIT AND 1No. 700/800 ERS UNIT FIXED TO EXISTING STEEL WORK VIA 580mm ERS RAIL

Sector B Elevation

Scale: 0 1:100 2m 4

Site Name: RIVER HOUSE

Site ID: 1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project: H3G HRV

NGR: E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM

circet UK

Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR


Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

EXISTING 3No. H3G RRUs TO BE REMOVED AND REPLACED WITH 1No. 18/21 ERS UNIT, 1No. 1400 ERS UNIT AND 1No. 700/800 ERS UNIT FIXED TO EXISTING STEEL WORK VIA 580mm ERS RAIL

EXISTING 1No. H3G REMOTE FIBRE BOB AND 1No. REMOTE DC BOB TO BE REUSED FOR PROPOSED UPGRADE

EXISTING 3No. H3G RRUs TO BE REMOVED AND REPLACED WITH 1No. 18/21 ERS UNIT, 1No. 1400 ERS UNIT AND 1No. 700/800 ERS UNIT FIXED TO EXISTING STEEL WORK VIA 580mm ERS RAIL

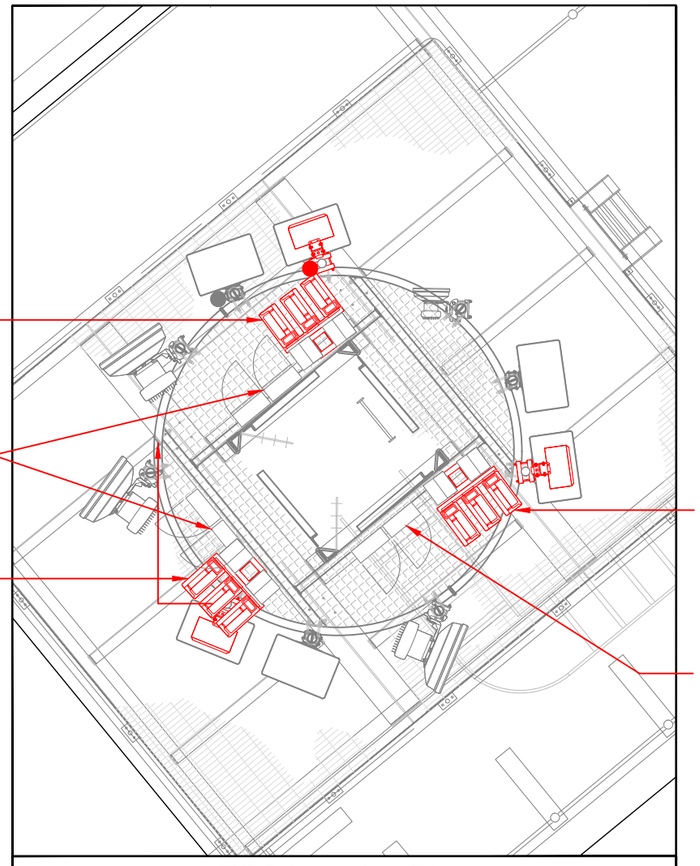

EXISTING 3No. H3G RRUs TO BE REMOVED AND REPLACED WITH 1No. 18/21 ERS UNIT, 1No. 1400 ERS UNIT AND 1No. 700/800 ERS UNIT FIXED TO EXISTING STEEL WORK VIA 580mm ERS RAIL

EXISTING 1No. H3G REMOTE FIBRE BOB AND 1No. REMOTE DC BOB TO BE REUSED FOR PROPOSED UPGRADE

ERS Location Plan

Site Name:
RIVER HOUSE

Site ID:
1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project:
H3G HRV

NGR:
E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM

circet UK

Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

Scale: 0 1:50 1m 2

General Notes:

- DO NOT SCALE DRAWINGS.
- ALL DIMENSIONS IN mm UNLESS NOTED OTHERWISE.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONFIRMING DIMENSIONS AND LEVELS ON SITE PRIOR TO THE COMMENCEMENT OF CONSTRUCTION OR FABRICATION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR SETTING OUT THE PROJECT ON SITE.

Structural Notes:

STRUCTURAL STEEL TO BE GRADE S275J0 MILD STEEL TO BS 4360

BOLTS TO BE GRADE 8.8 TO BS 4190, MINIMUM SIZE 12MM DIA
U.N.O. BEARING SURFACES TO BE CLEAN GALVANISED.

ALL STEELWORK TO BE GALVANISED.

A TORQUE SETTING OF 40N.M SHOULD BE APPLIED TO EACH M12, GRADE 8.8 U, N AND V BOLTS AND ALSO STUDDED RODS USED TO CONNECT ANTENNA AND DISH MOUNTING STEELWORK UNLESS DETAILED OTHERWISE. THIS TORQUE SETTING DOES NOT OVERRIDE MANUFACTURER TORQUE SPECIFICATION SUPPLIED FOR BESPOKE AND OFF-THE-SHELF ANTENNA AND DISH MOUNTING STEELWORK

FASTENERS AND CONNECTIONS - STEEL TO STEEL

ALL BOLTS SHALL BE SPUN GALVANISED FINISH IN ACCORDANCE WITH BS 7371.

ALL BOLTS SHALL BE SIZED IN LENGTH TO GIVE A MINIMUM EXTENSION BEYOND THE NUT OF THREE THREADS.

WHERE CONNECTIONS ARE MADE USING DISSIMILAR MATERIALS, ALL CONNECTIONS SHALL BE PROVIDED WITH NEOPRENE, 'TOP-HAT' WASHERS, SPRING WASHERS OR OTHER APPROVED BARRIER BETWEEN CONNECTOR AND MAIN MATERIAL, TO MINIMISE THE RISK OF BI-METALLIC (ELECTROLYTIC) CORROSION.

WHERE APPROPRIATE, TAPER WASHERS SHALL BE USED IN BOLTED CONNECTIONS.

WHERE A CONNECTION IS SUBJECT TO VIBRATION OR CYCLIC LOADING USE SHALL BE MADE OF LOCKNUTS, LOCKWASHERS OR SPRING WASHERS OR OTHER APPROVED METHODS AT LOCATIONS INDICATED ON THE DRAWING BY THE ENGINEER TO MINIMISE THE RISK OF LOOSENING OF THE CONNECTORS.


FASTENERS AND CONNECTIONS - STEEL TO CONCRETE OR MASONRY

THE PREFERRED METHOD OF FIXING STRUCTURAL FIXINGS INTO SOLID CONCRETE OR MASONRY WALLS SHALL BE THROUGH-BOLT FIXINGS UNLESS SPECIFIED OTHERWISE. WHERE THE THROUGH-BOLT FIXINGS CANNOT BE ACHIEVED RESIN ANCHOR FIXINGS SHOULD BE UTILISED UPON CONSULTATION WITH ENGINEER.


ALL RESIN ANCHORS INTO SOLID CONCRETE SHALL BE HILTI HIT RE500 RESIN INJECTION SYSTEM WITH HAS-R STAINLESS STEEL ANCHOR COMPONENTS, OR SIMILAR APPROVED, UNLESS NOTED OTHERWISE.

ALL RESIN ANCHORS INTO SOLID BRICKWORK OR OTHER SOLID MASONRY SHALL BE HILTI HIT HY50 RESIN INJECTION SYSTEM WITH HAS-R STAINLESS STEEL ANCHOR COMPONENTS, OR SIMILAR APPROVED, UNLESS NOTED OTHERWISE.


Note:
EXISTING RRU'S TO BE REMOVED AND REPLACED

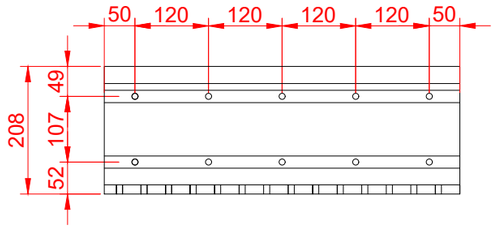


580mm ERS RAIL (SEF 901 305/0580)
SCALE 1:10

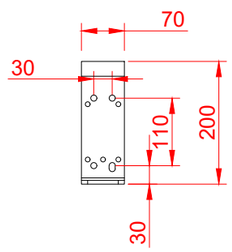

ERS RAIL BRACKET (SEF 901 304/1)
SCALE 1:10

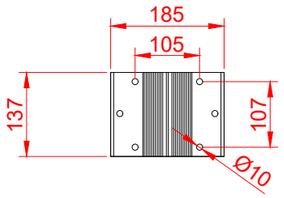



ERS RAIL POLE BRACKET
(SXK 125 2540/1)
SCALE 1:10

Site Name: RIVER HOUSE

Site ID: 1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project: H3G HRV

NGR: E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM

circet UK

Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

Scale: 0 1:10 200mm 400

	Total Load (kW)	Total Heat (kW)
MBNL Shared & TX total	6.14	3.13
H3G Equipment Total	9.87	0.14
EE Equipment Total	7.28	1.03
Manually added adjustment	0.30	0.03
SITE TOTALS	23.59	4.33


single-phase **AC Load**	102.56	**Amps**
three-phase **AC Load**	34.09	**Amps per phase**

Colour Key

■ Proposed

■ Existing

NOTE:
PROPOSED EQUIPMENT TO BE CONNECTED TO EXISTING LIGHTNING PROTECTION SYSTEM. CONNECTIONS AND SYSTEM TO BE TESTED ON SITE.

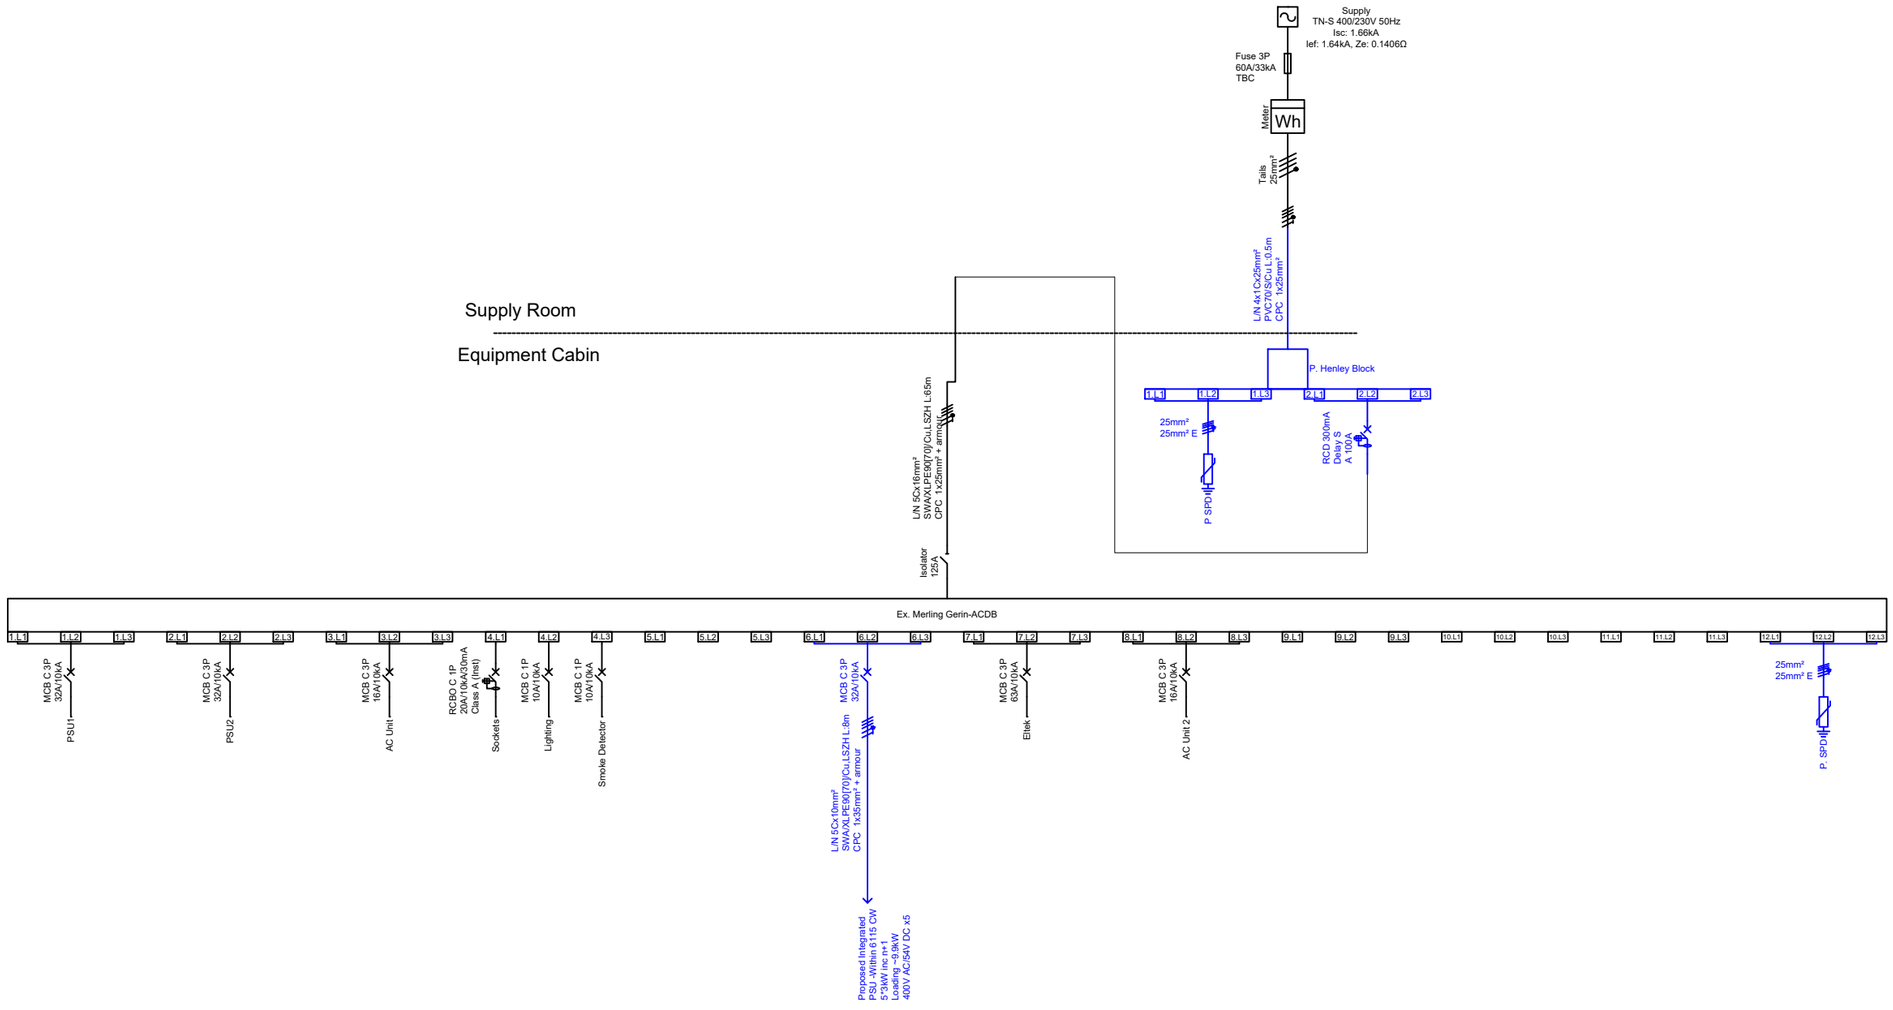

Site Name:
RIVER HOUSE

Site ID:
1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project:
H3G HRV

NGR:
E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM


circet UK

Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

NOTE:
PROPOSED EQUIPMENT TO BE CONNECTED TO EXISTING LIGHTNING PROTECTION SYSTEM. CONNECTIONS AND SYSTEM TO BE TESTED ON SITE.

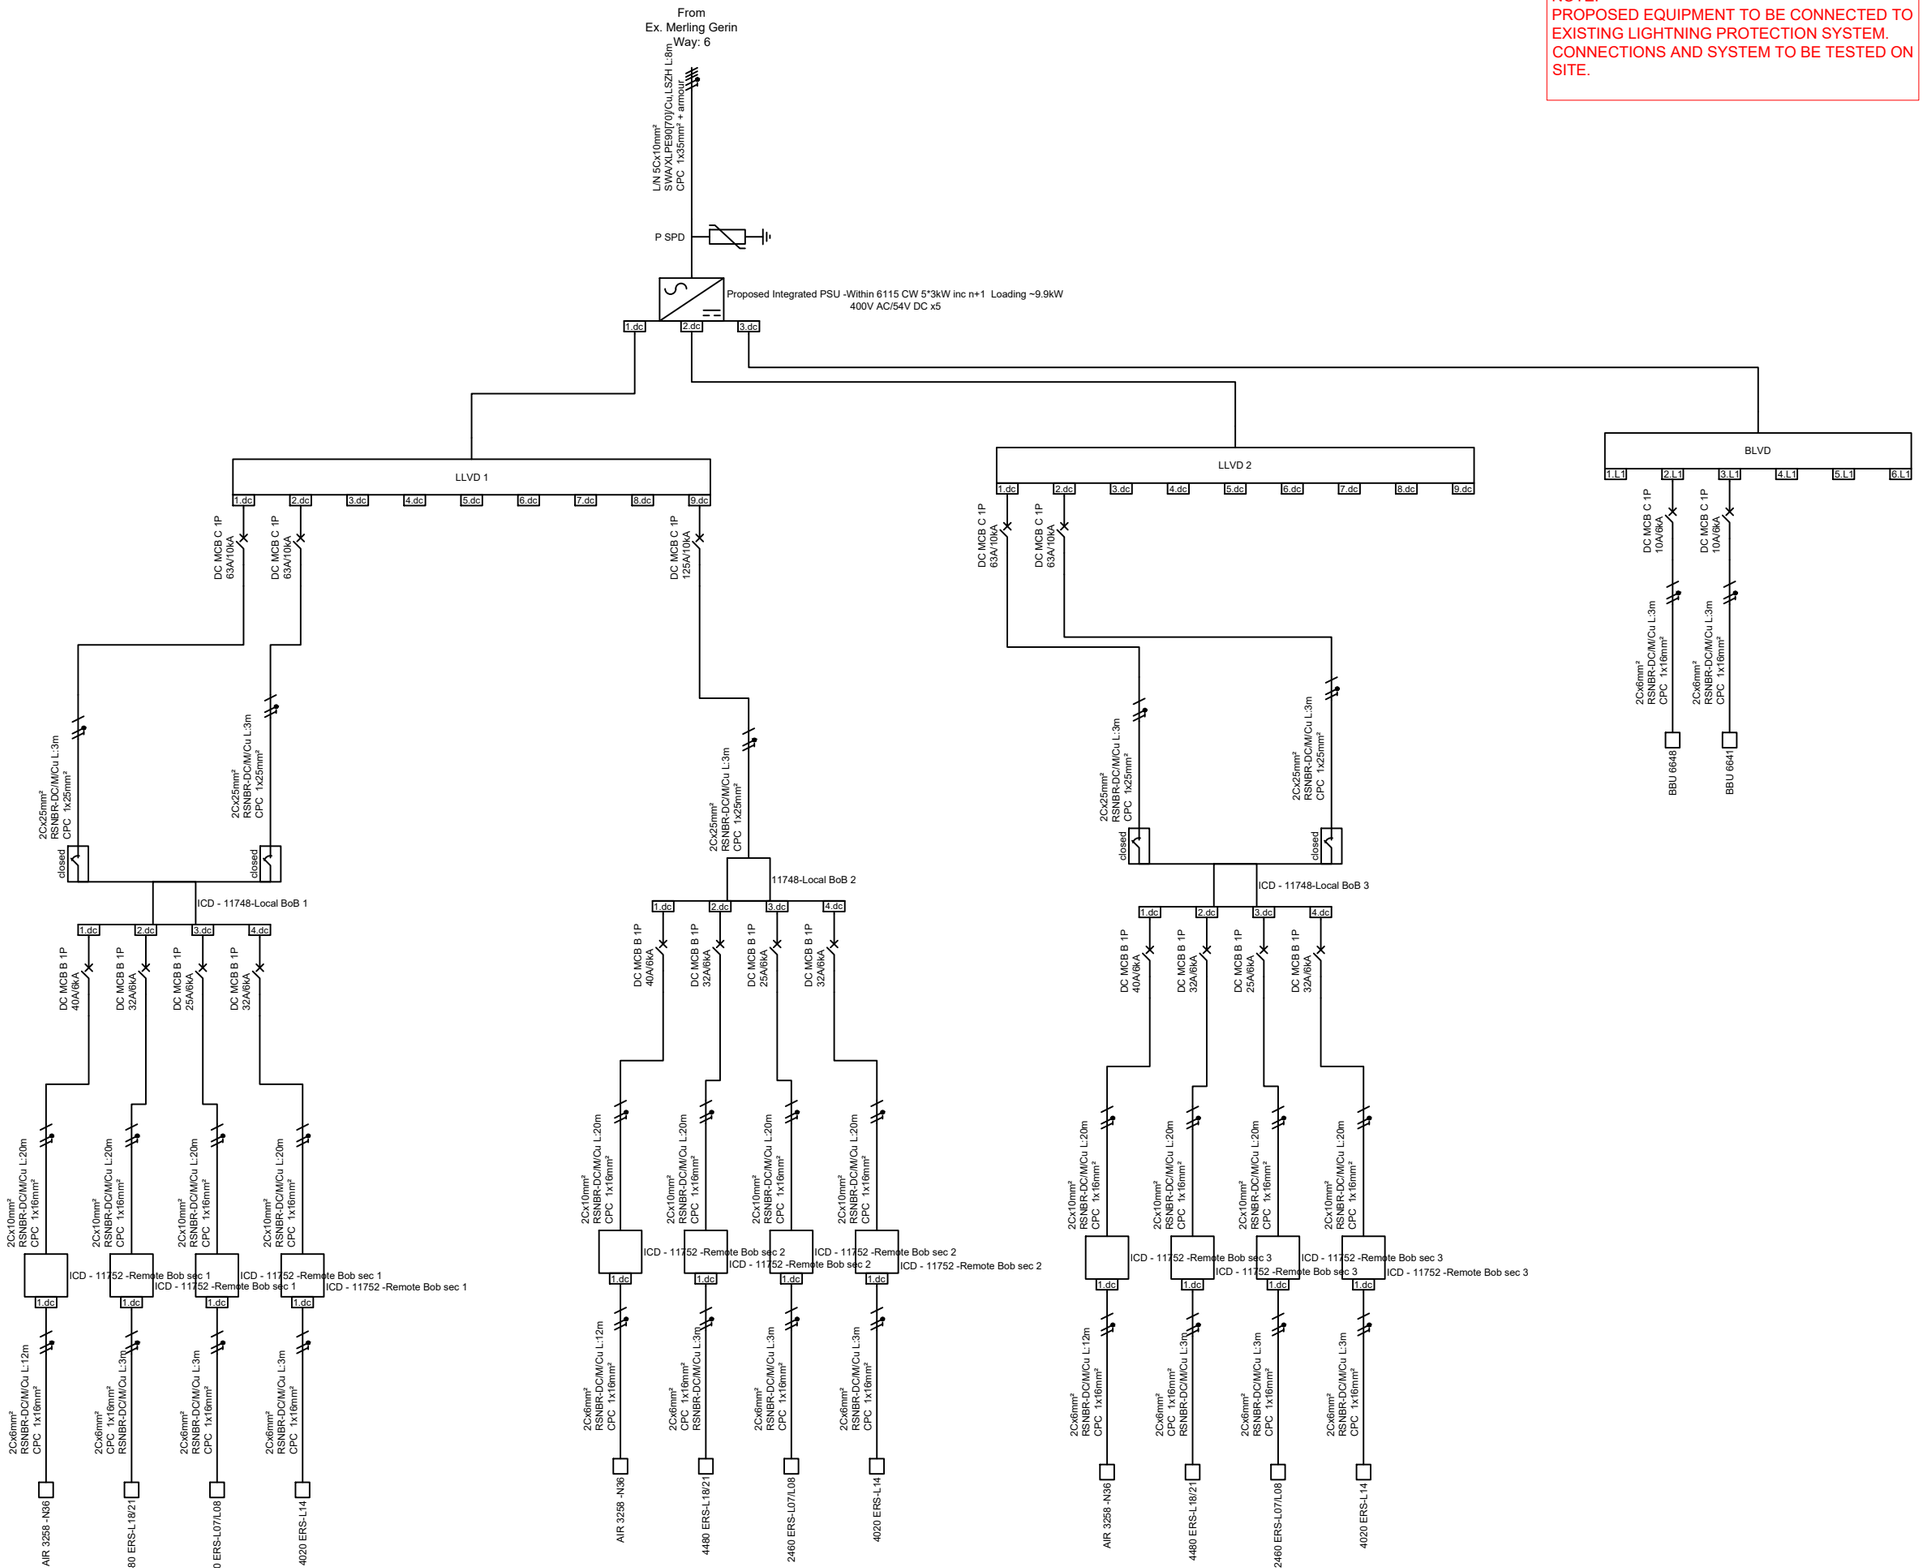

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

Site Name:
RIVER HOUSE

Site ID:
1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project:
H3G HRV

NGR:
E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED


Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM


Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2


Operators on site (or within 50m): H3G / EE / CTIL

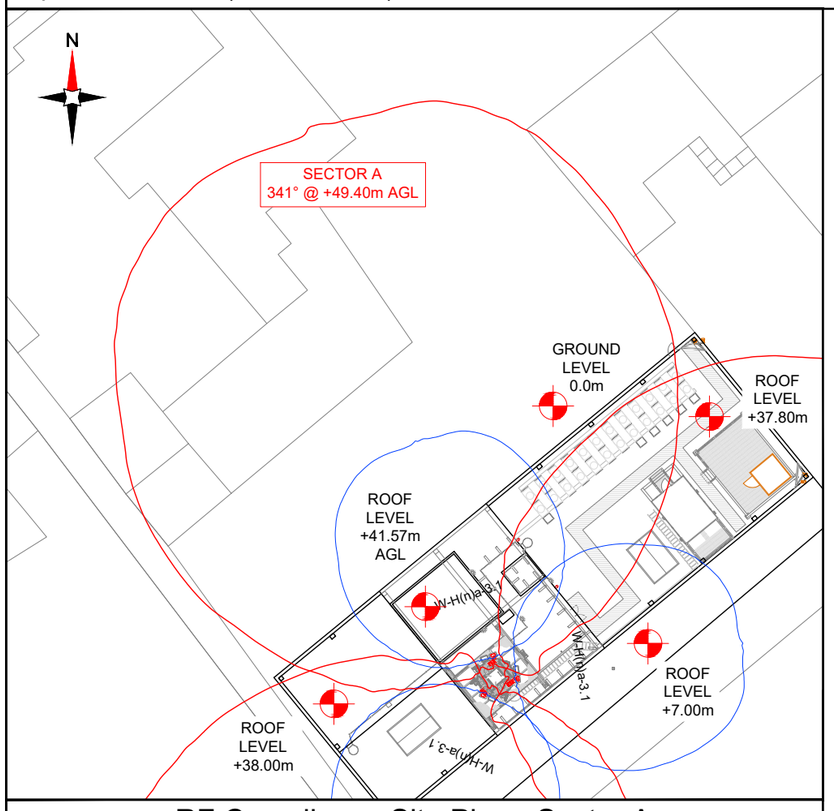

RF Compliance Site Plan - Sector A

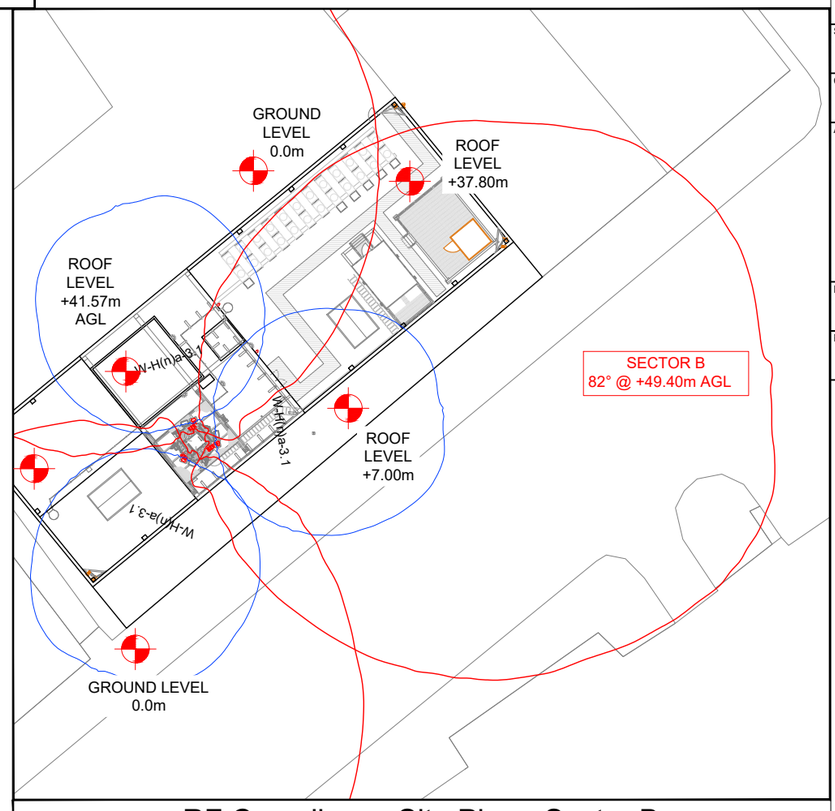

RF Compliance Site Plan - Sector B

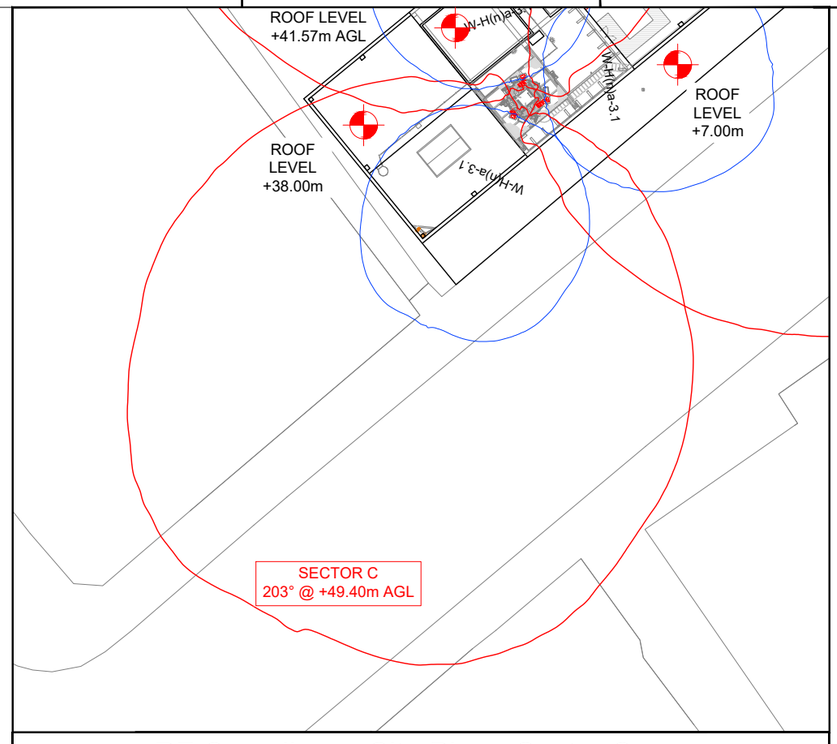

RF Compliance Site Plan - Sector C

Site Name: RIVER HOUSE

Site ID: 1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project: H3G HRV

NGR: E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM


Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2


Scale: 1:500

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2


Operators on site (or within 50m): H3G / EE / CTIL

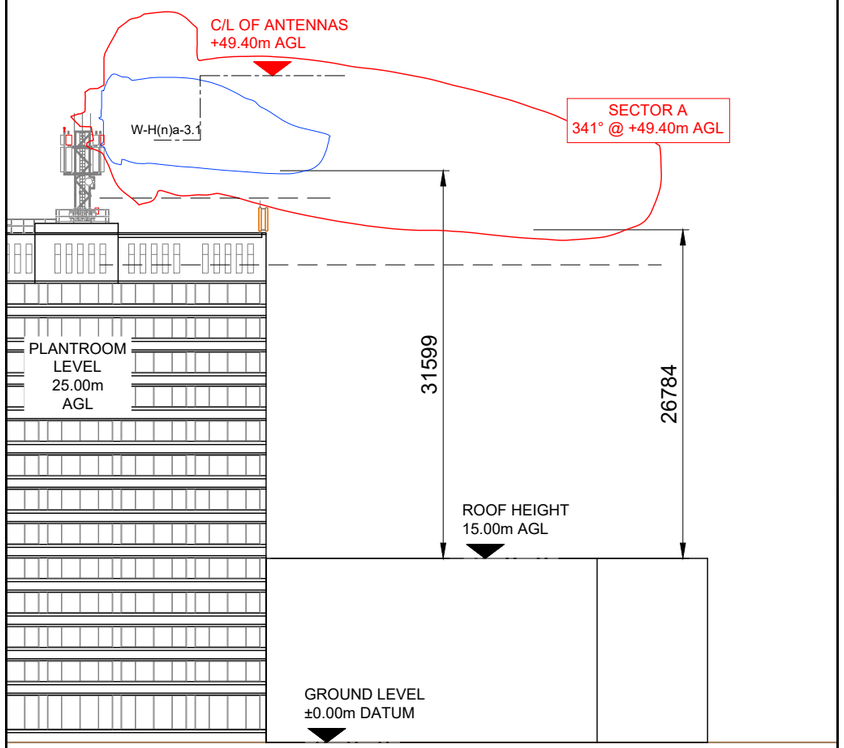

RF Compliance Site Elevation - Sector A

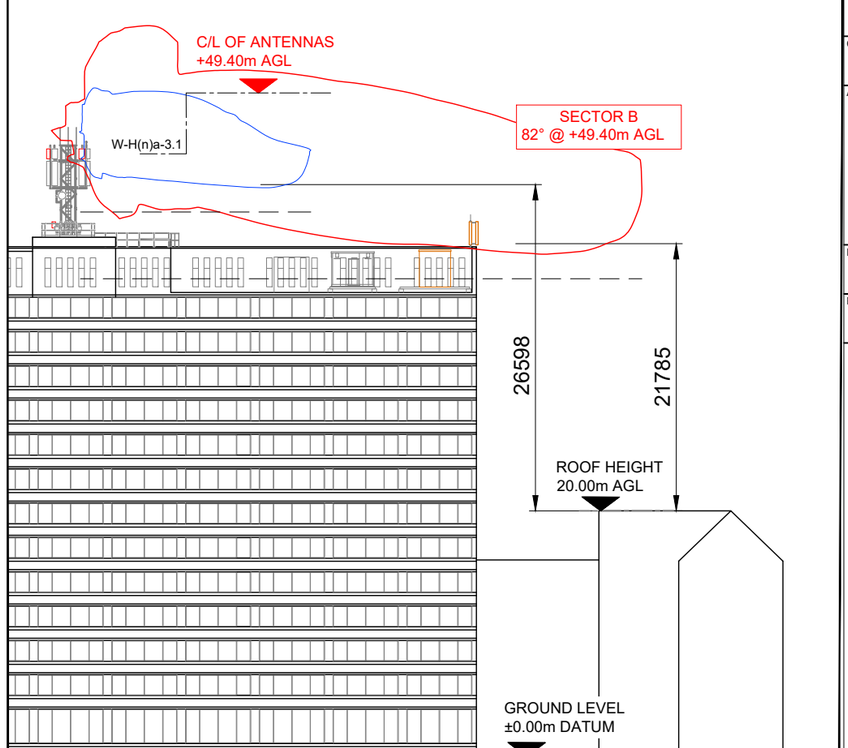

RF Compliance Site Elevation - Sector B

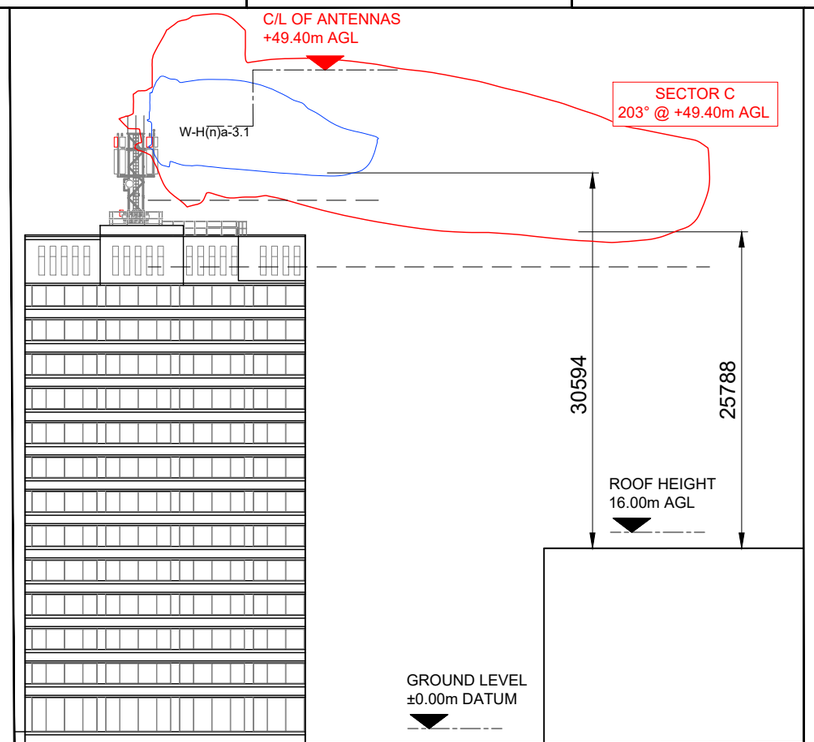

RF Compliance Site Elevation - Sector C

ICNIRP Compliance advising document, step or certificate update: TD54000v11.0 T&A Step 3.1
Document Ref: 4205592_1219660_BEL020_10590_BT0824_M008_MBNL_T&A_AB_AB1 Step 3.2

Scale: 1:500 (0, 10m, 20)

Site Name: RIVER HOUSE

Site ID: 1219600

Cell ID:	MBNL Cell ID:	3UK Cell ID:
10590	BEL020	BT0824

Address:
48 HIGH STREET
BELFAST
COUNTY ANTRIM
BT1 2DR

Direction to Site/QR Code:

Project: H3G HRV

NGR: E:146489 N:529889

Site Access:

- EMAIL REBECCA.SCOTT@McCONNELLPROPERTY.COM / 02890267817 / 02890205900 / 07436801634 WITH RAMS FOR ACCESS DURING BUILING RENOVATIONS
- PADLOCK ON ANTI-CLIMB 0000

Dependencies:

- ASBESTOS - SURVEY63300-01-11-2019 AVAILABLE ON ADC BUILD
- CALS/GDC - 21-12-2018 ON ADC BUILD
- POWER/COOLING - CEMS SURVEY 19-04-21
- ICNIRP - PASS - CERTIFICATE COMPLETED

Work Requirement:

- REMOVE EXISTING H3G IFS5906 RACK
- INSTALL NEW 615 RACK
- EXISTING 3No. 5501 RRUs (18/21), 3No. 5301 RRU's (800) AND 3No. 5301 RRU'S (1400) TO BE REMOVED AND REPLACED WITH 3No. 700/800 ERS UNITS (ADD 700), 3No. 18/21 ERS UNITS AND 3No. 1400 ERS UNITS ON 3No. ERS RAILS FIXED TO STEEL FRAME
- EXISTING RF TAILS TO BE REUSED
- INSTALL NEW GPS NODE ON EXISTING ANTENNA SUPPORT POLE
- REUSE EXISTING FIBRE CABLES (COMMSCOPE FA-FWS-E-250 WEATHERPROOFING SHROUD TO BE INSTALLED)
- EXISTING IDC AND FIBRE BOBS TO BE UPDATED WITH CONVERSION KIT
- EXISTING 3No. AAU5614 ANTENNAS TO BE REMOVED AND REPLACED WITH 3No. ERICSSON AIR 3258 ANTENNAS MOUNTED ON EXISTING STEELWORK
- EXISTING 6No. PASSIVE ROUTERS MOUNTED ON EXISTING STEELWORK TO BE REUSED FOR PROPOSED UPGRADE
- PROPOSED EQUIPMENT TO BE TIED INTO EXISTING LIGHTNING PROTECTION SYSTEM

circet UK

Three's Head Office
Green Park
450 Longwater Avenue
Reading
RG30 3UR

Date:	Drawn:	Checked:	Approved:	Revision:
06.11.23	ALC	LW	WD	A1
15.01.24	ALC	LW	WD	A2