
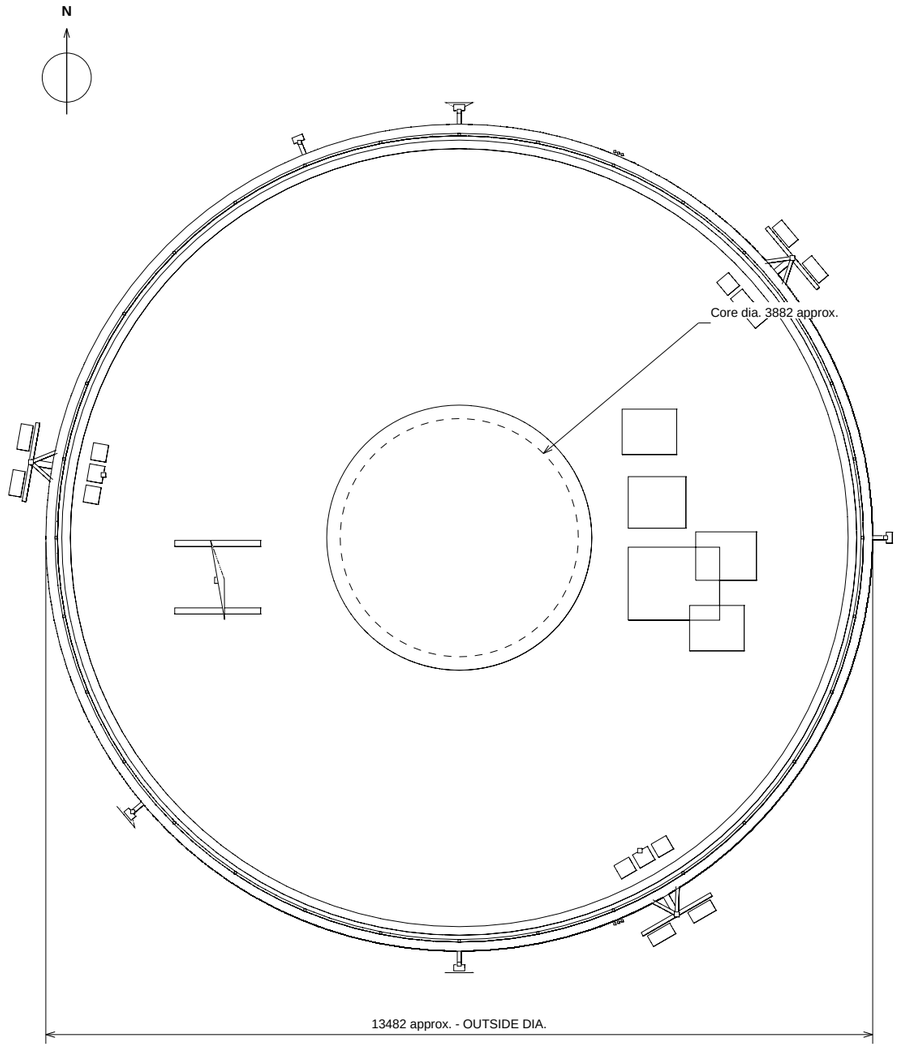


1 **Roof Plan**

1 : 100 | Existing telecom arrangement

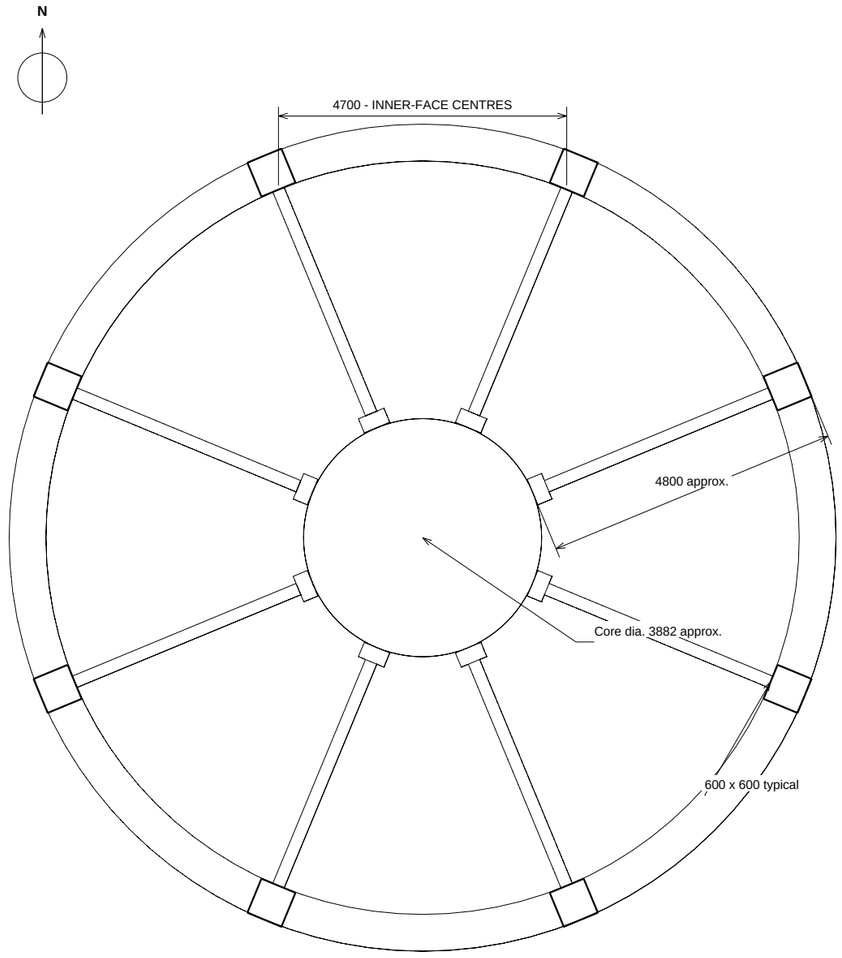

2 **Support Arrangement**

1 : 100 | Tank and lid omitted to show framing

DIMENSION BASIS

Inner-face chord: 4100 clear + 600 column width = 4700 (engineer convention).

Inner-face circle dia. = 4700 / sin 22.5 deg = 12282 approx.; column PCD = 12882 approx.

Outside dia. = 12282 + 2 x 600 = 13482 approx.; core dia. = 13482 - 2 x 4800 = 3882 approx.

Radial clear gap derives as 3950; survey reads 3900. Difference retained as rounding, not a new measured value.

SUPPORT DETAILS

8 columns 600 x 600; inner projections 250 radial; radial members 200 x 450; bottom ring 900 high x 600 radial.

Roof slab 150 thick. Inner projection width 450 shown schematically; exact hidden connections not surveyed.

ALL DIMENSIONS IN mm; LEVELS IN m AGL

DRAWING NOTES

1. Eight equal sectors adopted from the survey and agreed diameter derivation. Dimensions derived from approximate readings are marked approx.

2. Main roof +22.00; top of core +23.90. Approximate vertical survey chain totals 21.75; confirmed roof level governs.

3. Telecoms shown as existing. All external antenna mounting assemblies connect at bottom ring and top lid/parapet. Brackets schematic.

4. Parapet: 120 lower + 90 upper = 210 high. Width, core-cap projection/thickness and roof equipment sizes schematic.

5. Tank wall/floor thickness, foundations, reinforcement and concealed connections not established. External geometry only.

MEMBER / LEVEL KEY

Columns: 600 x 600

Inner column projection: 250 radial

Radial beams: 200 x 450 (survey)

Bottom ring: 900 high x 600 radial

Rev	Issue	Drawn	Chkd	Date
1	REVIEW	ST	AF	26-10-26

Consultant:

KA ENGINEERING GROUP

Client:

JET network solutions

Drawing Title:

Water Tower - Plans

SOUTH WATER TOWER

SOUTH ROAD, BECCLES, NORFOLK


NR34 9NZ

Drawn: ST Checked: AF

Plans 1:100 at A3


Project: 7068 Dwg: 7068-01

Revision: 1

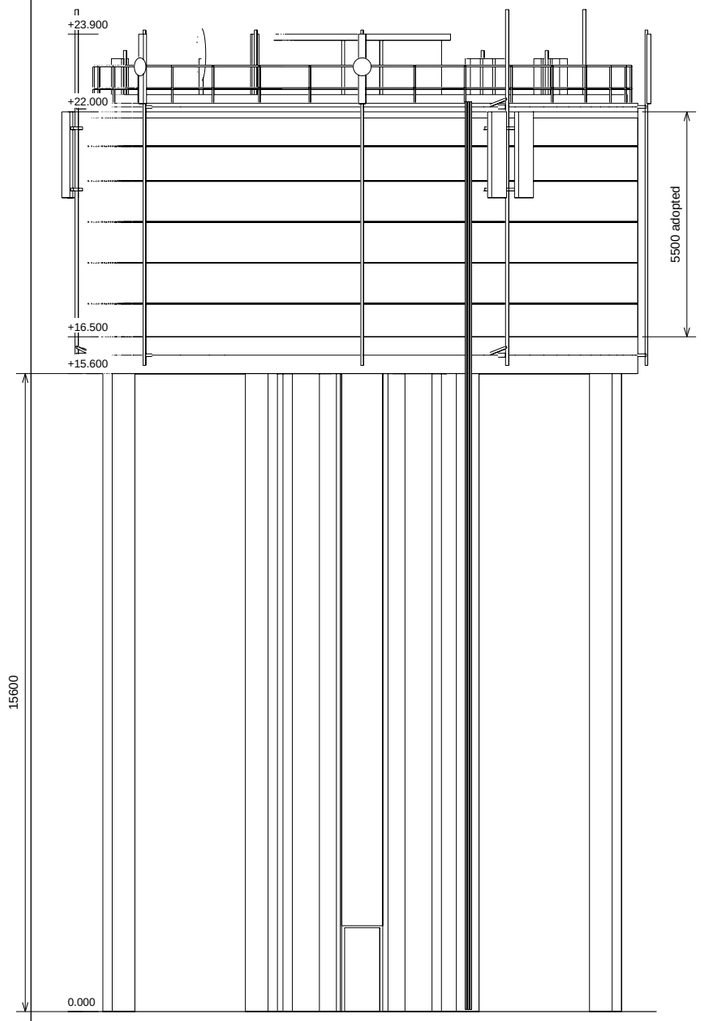


1 **South Elevation**

1 : 150 | Doorway side; roof door schematic

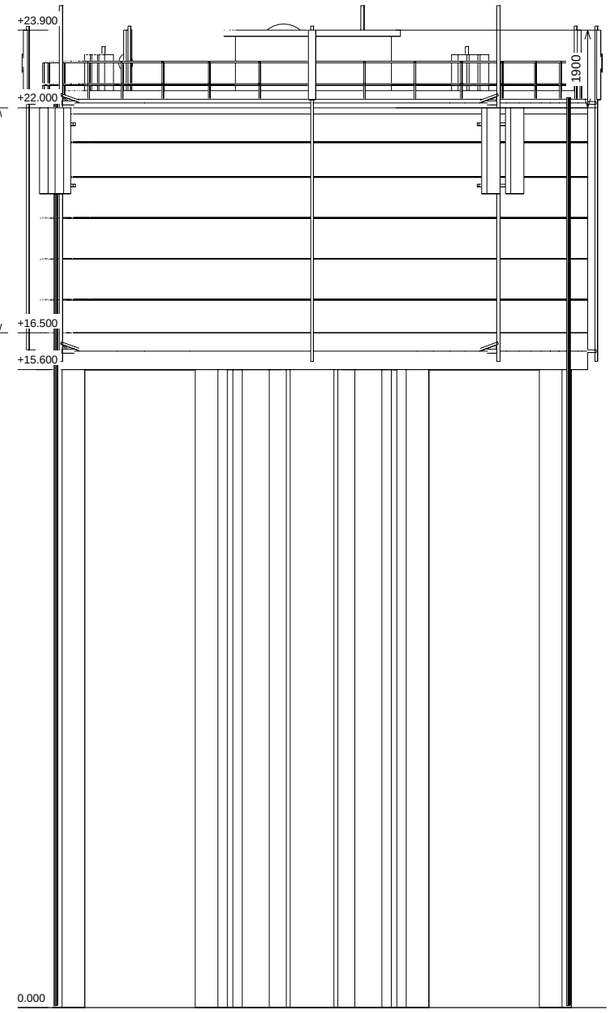

2 **East Elevation**

1 : 150 | GA orientation

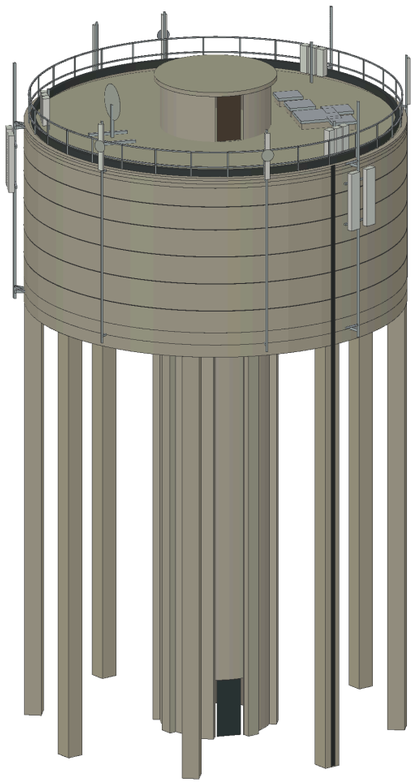

3 **3D View**

NTS | Model for review / approval

Tank lid +22.00 m controls model; 5.25 m survey height is approximate. Parapet top +22.210 m.

ALL DIMENSIONS IN mm; LEVELS IN m AGL

DRAWING NOTES

1. Eight equal sectors adopted from the survey and agreed diameter derivation. Dimensions derived from approximate readings are marked approx.

2. Main roof +22.00; top of core +23.90. Approximate vertical survey chain totals 21.75; confirmed roof level governs.

3. Telecoms shown as existing. All external antenna mounting assemblies connect at bottom ring and top lid/parapet. Brackets schematic.

4. Parapet: 120 lower + 90 upper = 210 high. Width, core-cap projection/thickness and roof equipment sizes schematic.

5. Tank wall/floor thickness, foundations, reinforcement and concealed connections not established. External geometry only.

MEMBER / LEVEL KEY

Columns: 600 x 600

Inner column projection: 250 radial

Radial beams: 200 x 450 (survey)

Bottom ring: 900 high x 600 radial

Rev	Issue	Drawn	Chkd	Date
1	REVIEW	ST	AF	26-10-26

Consultant:

KA ENGINEERING GROUP

Client:

JET network solutions

Drawing Title:

Water Tower - Elevations / 3D

SOUTH WATER TOWER

SOUTH ROAD, BECCLES, NORFOLK

NR34 9NZ

Drawn: ST Checked: AF

Elevations 1:150 at A3 / 3D NTS

Project: 7068 Dwg: 7068-02

Revision: 1