ALL DIMENSIONS IN mm UNLESS STATED OTHERWISE


NOTES:

1. Main roof +38.00 m; plant-room roof +41.57 m.

2. Columns continue from ground through main roof to plant-room roof / parapet level.

3. Upper roof framing: B1 long-dash; B2 dash-dot.

MAIN ROOF +38.00 m

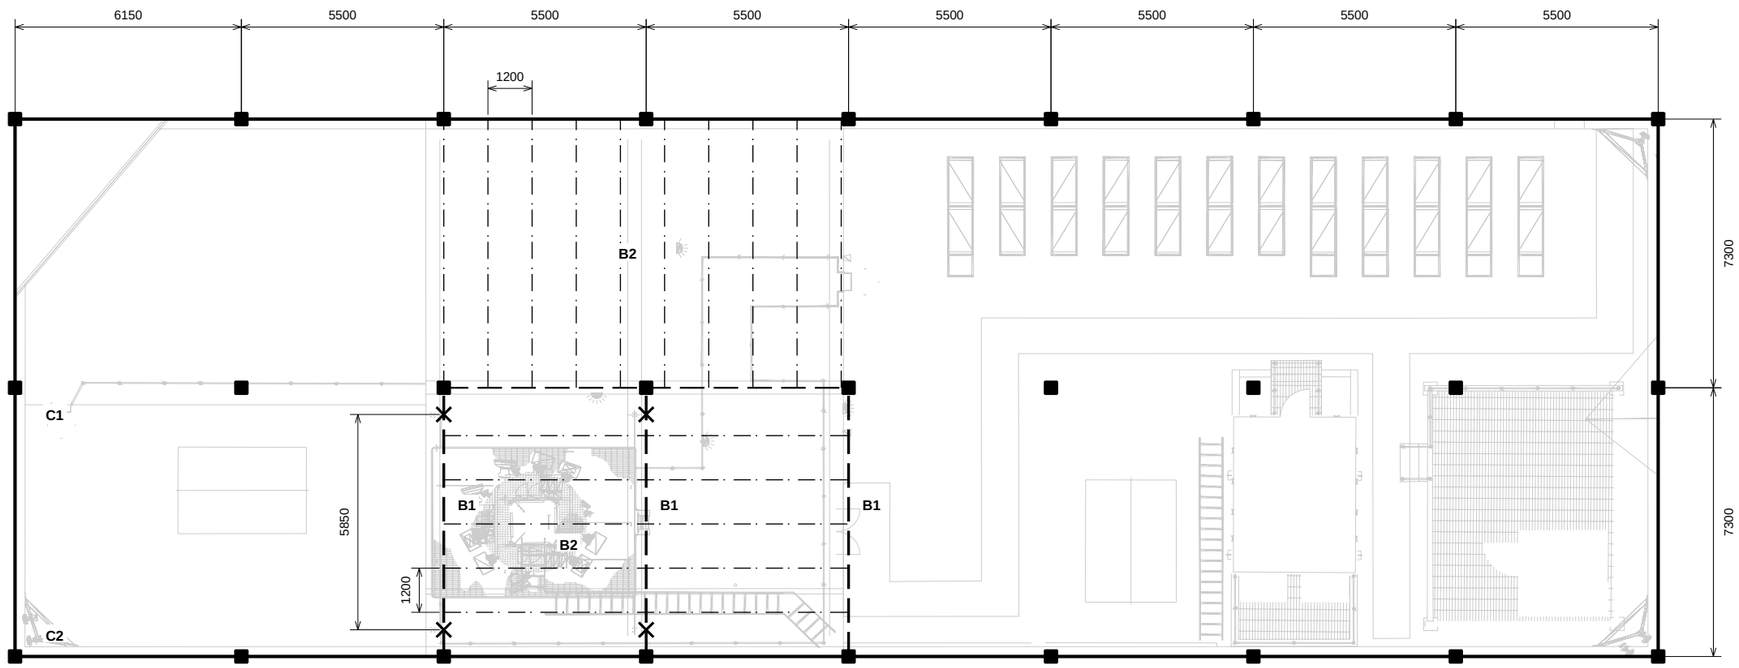

PLANT-ROOM ROOF ABOVE +41.57 m

STRUCTURAL MEMBER KEY

- Main-roof beam — 325 wide x 300 deep
- B1: plant-room roof beam — 380 x 380
- B2: plant-room roof beam — 380 wide x 180 deep
- C1 central columns: 380 x 380; C2 perimeter: 380 x 300 exposed
- GA reference geometry — Light background
- X: grillage connection — Pairs 5850 apart, centred

TBC	REVIEW	AT	KS	24-10-26
Rev	Issue	Drawn	Chkd	Date

Consultant:

KA ENGINEERING GROUP

Client:

Ancore

Drawing Title:

Roof Support Layout

Site / Address:


RIVER HOUSE
48 HIGH STREET, BELFAST
COUNTY ANTRIM, BT1 2DR

Drawn: AT Checked: KS

Scale: NTS / DO NOT SCALE


Project: 7078 Drawing: 7078-01

Revision: TBC

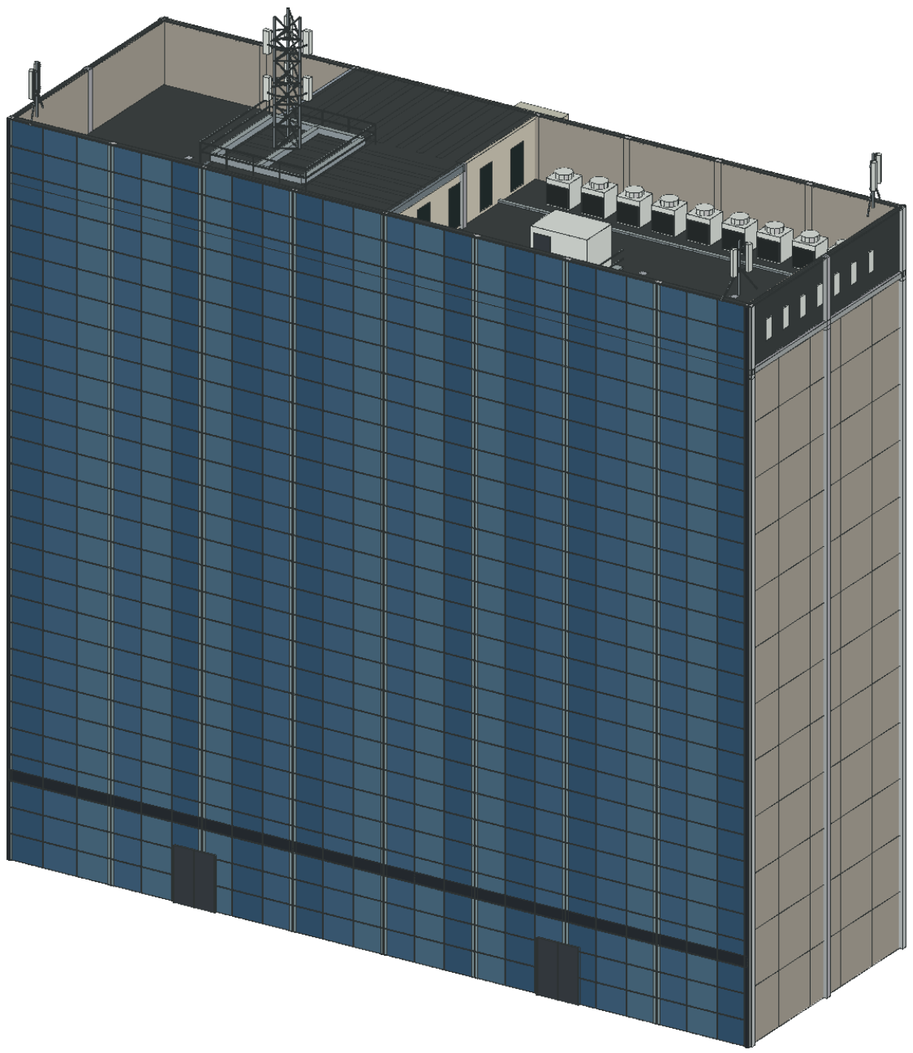

1 Street frontage and roof

3D View / NTS

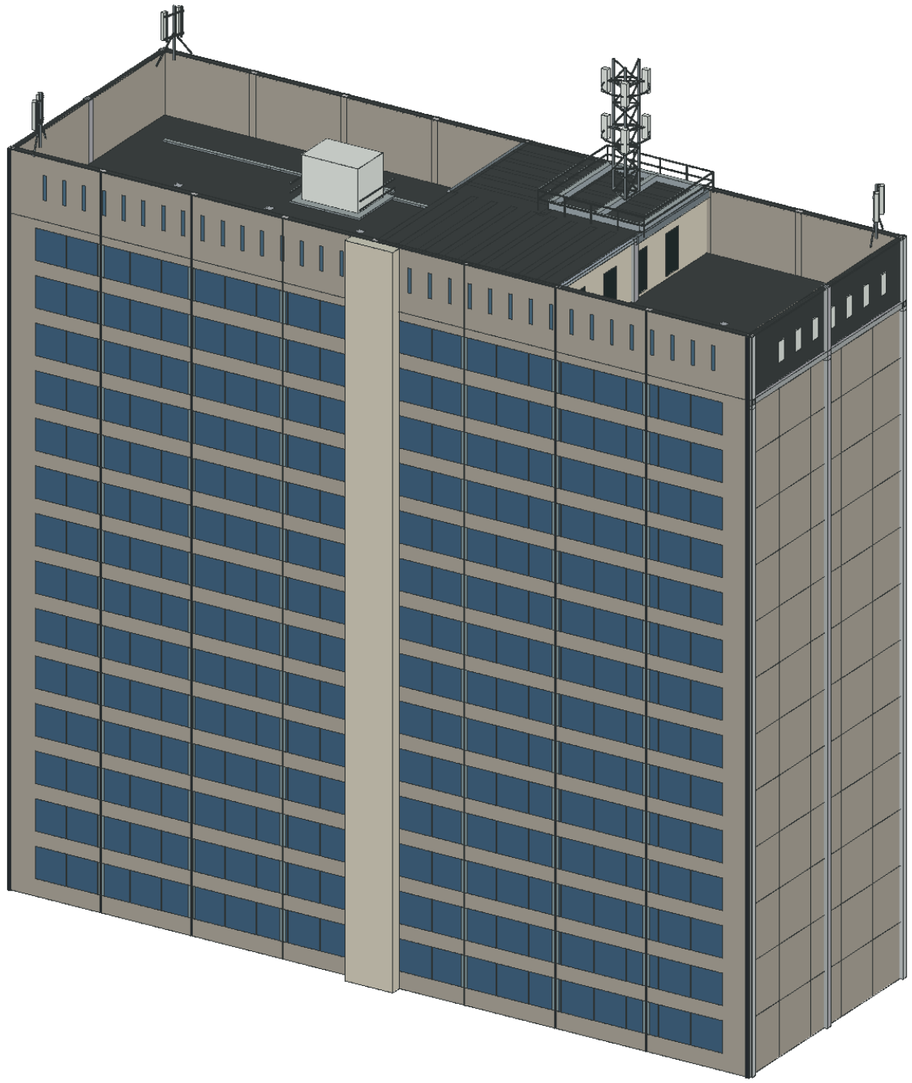

2 Rear elevation and roof

3D View / NTS

ALL DIMENSIONS IN mm UNLESS STATED OTHERWISE

3D MODEL NOTES:

1. Entire-building visual model from GA, survey and supplied photographs.

2. Main roof +38.00 m; upper roof / parapet +41.57 m.

3. Facade grids and unmeasured equipment details are approximate.

4. Hidden connections and structural capacity are not established.

5. OBJ / MTL matches corrected model. Metres; Y up; ground at Y=0.

MODEL CONTENT

Glazed street frontage

Rear bands and service spine

End cladding and roof vents

Roof support / plant-room zone

Simplified tower and antennas

Indicative HVAC and access cabin

Rev	Issue	Drawn	Chkd	Date
TBC	REVIEW	AT	KS	24-10-26

Consultant:

KA ENGINEERING GROUP

Client:

Ancore

Drawing Title:

Building 3D Model

Site / Address:

RIVER HOUSE
48 HIGH STREET, BELFAST
COUNTY ANTRIM, BT1 2DR

Drawn: AT Checked: KS

Scale: NTS / DO NOT SCALE

Project: 7078 Drawing: 7078-02

Revision: TBC